

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
23 May 2002 (23.05.2002)


PCT

(10) International Publication Number  
WO 02/41107 A2

- (51) International Patent Classification<sup>7</sup>: G06F
- (21) International Application Number: PCT/US01/43919
- (22) International Filing Date:  
18 November 2001 (18.11.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
60/252,682 20 November 2000 (20.11.2000) US
- (71) Applicant: FLEXIWORLD TECHNOLOGIES, INC.  
[US/US]; 16900 SE 26th Drive #94, Vancouver, WA 98687 (US).
- (72) Inventors: CHANG, William, Ho; 16900 SE 26th Drive #94, Vancouver, WA 98687 (US). LIU, Chritina, Ying; 16900 SE 26th Drive #94, Vancouver, WA 98687 (US).
- (74) Agent: MEININGER, Mark, M.; Ipsolon LLP, 805 SW Broadway #2740, Portland, OR 97205 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR,

[Continued on next page]

(54) Title: SYSTEMS AND METHODS FOR MOBILE AND PERVASIVE OUTPUT

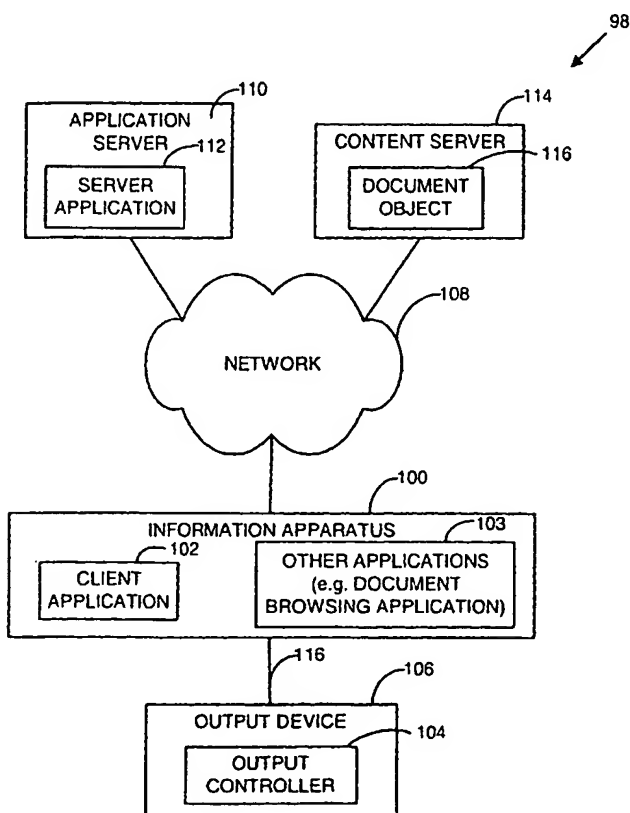

(57) Abstract: Pervasive output capability is provided so that an information apparatus can pervasively output digital content to an output device regardless of the processing power, display screen size and memory space of the information apparatus. This allows small mobile devices with limited display, processing power, and memory to be able to output a digital document (e.g., PDF, HTML, PowerPoint etc) in its full original richness, without resorting to downsizing, truncating, reducing, clipping or otherwise altering the original document. A data output system for rendering at an output device output content managed from an information apparatus may include means for obtaining a document object relating to the output content managed from the information apparatus and means for obtaining an output device object with one or more attributes corresponding to the output device. The document object and the output device object may be provided to a server application that is operated on a server that is distinct from the information apparatus and the output device and that generates output data employing at least partly the document object and the output device object. The output data is then provided to the output device for rendering the output content.



GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent  
(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR,  
NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *without international search report and to be republished  
upon receipt of that report*

## **Systems and Methods For Mobile And Pervasive Output**

### **Technical Field of the Invention**

Present invention relates to providing digital content to an output  
5 device and, in particular, to providing pervasive output in which an information  
apparatus can pervasively output digital content to an output device regardless  
of the processing power, display screen size and memory space of the  
information apparatus.

### **Background and Summary of the Invention**

10 Present invention relates to device synchronization and digital  
output and, in particular, to providing pervasive output for information  
apparatuses.

As described herein, information apparatuses refer generally to  
computing devices, which include both stationary computers and mobile  
15 computing devices (pervasive devices). Examples of such information  
apparatuses include, without limitation, desktop computers, laptop computers,  
networked computers, palmtop computers (hand-held computers), personal  
digital assistants (PDAs), Internet enabled mobile phones, smart phones,  
pagers, digital capturing devices (e.g., digital cameras and video cameras),  
20 Internet appliances, e-books, information pads, and digital or web pads. An  
output device may include any one or more of fax machines, printers, copiers,  
image and/or video display devices (e.g., televisions, monitors and projectors),  
and audio output devices.

For simplicity and convenience, hereafter, the following description  
25 may refer to an output device as a printer and an output process as printing.  
However, it should be understood that the term printer and printing used in the  
discussion of present invention may refer to a specific example used to simplify  
description or may be one exemplary embodiment. The reference to printer and  
printing used here is intended to be applied or extended to the larger scope and  
30 definition of output devices and should not be construed as restricting the scope  
and practice of present invention.

Fueled by ever-increasing bandwidth and processing power and  
ever-increasing numbers of wireless mobile devices and available software

applications for pervasive devices, millions of users are or will be creating, downloading, and transmitting content and information using their pervasive computing devices. As a result, there is a need to allow users to easily output content and information from their pervasive computing devices to any output  
5 device. People need to output directly and conveniently from their pervasive information apparatus, without depending on synchronizing with a stationary computer (e.g., desktop personal computer) for printing, as an example.

To illustrate, an information worker at an airport receiving Email in his hand-held computer may want to walk up to a nearby printer or fax machine  
10 to have his e-mail printed. In addition, the mobile worker may also want to print a copy of his to-do list, appointment book, business card, and his flight schedule from his mobile device. As another example, a user reading a news article using his/her Internet-enabled pager or mobile phone may want to print out the complete article instead of reading it through the small screen on the pager or  
15 mobile device. In still another example, a user visiting an e-commerce site using his mobile phone may want to print out pictures of the product he/she is buying because the pictures (image and/or graphics) may not be displayed on the small screen of his/her mobile phone. In yet another example, a user who takes a picture with a digital camera may want to easily print it out to a nearby  
20 printer. In still another example, a user with a mobile device may want to simply walk up to a printer and conveniently print a file that is stored on the mobile device or that is stored on a network (e.g., Internet, corporate network) and accessible from the mobile device, such as a PowerPoint® display application document, word processing document, or a document in any other file format  
25 such as PDF, HTML, JPEG etc. In addition, a user should also be able to print a web page or a book or a report published on the Internet. Finally, a user may want to output a complete web page or any document or file to a larger display screen nearby, even though the small screen of his/her mobile device cannot completely display or open a document of such a size.

30 Conventionally, an output device (e.g., a printer) is connected to an information apparatus via a wired connection such as a cable line. A wireless connection is also possible by using, for example, radio communication or infrared communication. Regardless of wired or wireless connection, a user

must first install in the information apparatus an output device driver (e.g., printer driver in the case the output device is a printer) corresponding to a particular output device model and make. Using a device-dependent or specific driver, the information apparatus may process output content or digital document into a specific output device's input space (e.g., printer input space). The output device input space corresponds to the type of input that an output device (e.g., a printer) understands (herein referred to as output data or print data in the case the output device is a printer). For example, the printer input space or print data may include printer specific input format (e.g., one or more of an image format, graphics format, text format, audio format, video format, file format, and data format), encoding, language (e.g., page description language, markup language etc), instructions, protocols or data that can be understood or used by a particular printer make and model.

Output data may be proprietary or published or a combination of the two. An output device's input space or output data is therefore, in general, device dependent. Different output device models may have their own input spaces specified, designed or adopted by the output device manufacturer (e.g., the printer manufacturer) according to a specification for optimal operation. Consequently, different output devices usually require use of specific output device drivers (e.g., printer drivers) for accurate output (e.g., printing). For example, a printer driver may control, manage, communicate, and output print data to a printer. Sometimes, instead of using a device driver (e.g., printer driver), the device driving feature may be included or as part of an application software.

Installation of a device driver (e.g., printer driver) or application may be accomplished by, for example, manual installation using a CD or floppy disk supplied by the printer manufacturer. Or alternatively, a user may be able to download that particular driver or application from a network. For a home or office user, this installation process may take anywhere from several minutes to several hours depending on the type of driver and user's sophistication level with computing devices and networks. Even with plug-and-play driver installation, the user is still required to execute a multi-step process for each printer or output device.

This installation and configuration process adds a degree of complexity and work to end-users who may otherwise spend their time doing other productive or enjoyable work. Moreover, many unsophisticated users may be discouraged from adding new peripherals (e.g., printers, scanners, etc.) to their home computers or networks to avoid the inconvenience of installation and configuration. Therefore, there is a need to provide a manner in which a user can more conveniently or easily output digital content to an output device without the inconvenience of finding and installing new device drivers or printer drivers.

In addition, conventional output or printing methods may pose significantly higher challenges and difficulties for mobile device users than for home and office users. The requirement for pre-installation of a device-dependent driver diminishes the benefit and concept of mobile (pervasive) computing and output. For example, a mobile user may want to print or output e-mail, PowerPoint® presentation documents, web pages, or other documents in an airplane or at an airport, gas station, convenient store, kiosk, hotel, conference room, office, home, etc. It is highly unlikely that the user would find at any of these locations a printer of the same make and model as is at the user's base station. It is usually not a viable option to pre-install all of the possible hundreds, or even thousands, of printer drivers or device drivers available to the user's information apparatus.

As a consequence, the user would currently have to install and configure a printer driver each time at each such remote location before printing. Moreover, the user may not want to be bothered with looking for a driver or downloading it and installing it just to print out or display one page of email at the airport. This is certainly an undesirable and discouraging process to promote pervasive or mobile computing. Therefore, a more convenient or automated printing and output solution is needed so that a user can simply walk up to an output device (e.g., printer or display device) and easily output a digital document without having to install or pre-install a particular output device driver (e.g., printer driver).

Another challenge for mobile users is that many mobile information apparatuses have limited memory space, processing capacity and

power. These limitations are more apparent for small and low-cost mobile devices including, for example, PDAs, mobile phones, screen phones, pagers, e-books, Internet Pads, Internet appliances etc. Limited memory space poses difficulties in installing and running large or complete printer or device drivers, not to mention multiple drivers for a variety of printers and output devices. Slow processing speed and limited power supply create difficulties driving an output device. For example, processing or converting a digital document into output data by a small mobile information apparatus may be so slow that it is not suitable for productive output. Heavy processing may also drain or consume power or battery resources. Therefore, a method is needed so that a small mobile device, with limited processing capabilities, can still reasonably output digital content to various output devices.

Finally, some small mobile devices with limited display screens, such as mobile phones, may in some cases be limited to display only a few lines of text. Browsing the Internet with such devices can be a disappointing experience when viewing, for example, complex web pages containing rich formats, graphics, and images. Furthermore, some small mobile devices may not have appropriate applications to display complex documents or languages such as PDF-format files, word processing documents and PowerPoint® presentation documents etc. Typically, if an application is available, displaying complex original documents on small mobile devices may require downsizing the document or page into, for example, a few lines of text. As an example, WAP protocol, I-Mode, and web clipping among others may downsize, reduce or truncate information on the original web page for display on mobile devices. Therefore, it is desirable to allow mobile users to output from their small information apparatuses to an output device the full richness of the original document content.

One implementation of the present invention provides an easy, friendly and convenient process for digital output. Unlike conventional output or printing, a user does not have to manually pre-install a device driver (e.g., printer driver) from a CD, floppy disk, or download the driver somewhere from a network. This is well-suited for providing output capability to small and lower-

cost mobile devices with limited memory space, power supply and processing capability to still be able to output or print to an output device.

In addition, this allows small mobile devices with limited display, processing power, and memory to be able to output a digital document (e.g.,  
5 PDF, HTML, PowerPoint etc) in its full original richness, without resorting to downsizing, truncating, reducing, clipping or otherwise altering the original document. A user can output the original content or document even when the small mobile device cannot display or fully display the original digital document or content.

10 Finally, one implementation provides a convenient method allowing users to output to an output device with or without connection to a static network. Through local communication and synchronization between information apparatus and output device, hardware and software installation for static or permanent network connectivity may not be necessary for the output  
15 device.

Additional objects and advantages of the present invention will be apparent from the detailed description of the preferred embodiment thereof, which proceeds with reference to the accompanying drawings.

## 20 **Brief Description of the Drawings**

Fig. 1 is a block diagram of a pervasive output system that can implement the process and apparatus of the present invention.

Figs. 2A and 2B are block diagrams illustrating exemplary configurations of hardware components of wireless communication units.

25 Figs. 3A-3C illustrate various configurations and implementations of output controller with respect to an output device such as a printer.

Fig. 4 is a flow diagram of a pervasive output process of the present invention.

30 Fig. 5 is a flow diagram of an exemplary implementation of a discovery process optionally included in the output process of Fig. 4.

Fig. 6 is a flow diagram of an exemplary client application process included in the output process of Fig. 4.



Fig. 7 is a flow diagram of an exemplary server application process utilized in the output process of Fig. 4.

Fig. 8 is a flow diagram of an exemplary final output process for pervasive output.

5           Figs. 9A - 9F show a series of exemplary graphical user interfaces (GUIs) rendered at different times on a display screen of an information apparatus.

Fig. 10A is an exemplary block diagram of a conventional printing system or printer with a conventional printer controller.

10           Fig. 10B is an exemplary block diagram of a conventional output system or an output device such as a printing system or printer that does not include a conventional printer controller.

### **Detailed Description of Preferred Embodiments**

15           Sets forth below are definitions of terms that are used in describing implementations of the present invention. These definitions are provided to facilitate understanding and illustration of implementations of the present invention and should in no way be construed as limiting the scope of the invention to a particular example, class, or category.

#### **20           Objects**

          An object may refer to a software and data entity, which may reside in different hardware environments or platforms or applications. An object may encapsulate within itself both data and attributes describing the object, as well as instructions for operating that data. For simplicity of  
25       discussion, an object may also include, for example, the concept of software components that may have varying granularity and can consist of one class, a composite of classes, or an entire application.

          It is important to note that the term object is not limited to software or data as its media. Any entity containing information, descriptions, attributes,  
30       data, instructions etc. in any computer-readable form or medium such as hardware, software, files based on or including voice, text, graphics, image, or video information, electronic signals in analog or digital form, etc., are all valid forms of object definition.

An object may also contain in one of its fields or attributes a reference or pointer to another object, or a reference or pointer to data and or content. (The terms reference and pointer may be used interchangeably herein.) A reference to an object or any entity or content may include one or  
5 more, or a combination of, pointers, identifiers, names, paths, addresses or any descriptions relating to a location where an object, data, or content can be found. Examples of reference may include universal resource identifier scheme (URI), uniform resource locator (URL), IP address, file names, directory  
10 pointers, software object and component pointers, and run-time address, among others.

By way of example, a document object described in the present invention may contain or encapsulate one or more digital documents and/or one or more pointers or references to digital documents. Therefore, moving or passing document objects in connection with the present invention may include  
15 moving or passing (1) actual digital content or (2) reference to the actual content or (3) both. It will be appreciated that the document object can be quite small and lightweight if it does not also contain the digital document. These are examples of valid implementations and may be used in the description of present invention. Different implementations in different situations can be easily  
20 discerned and recognized by persons of ordinary skill in the art.

An object can reside anywhere in a network and can be transmitted to different environments, platforms, or applications. Downloading or transferring an object over the network may involve protocols such as file transfer protocol (FTP) or hypertext transfer protocol (http), among others.  
25 Transferring an object may also involve using messages or other methods through an object or component model. Three major objects used and described in present invention are output device object (or printer object in the case the output device is a printer), job object, and document object.

Output Device Object (or Printer Object in the case the output  
30 device is a printer)

An output device object may contain one or more attributes that may identify and describe, for example, the capabilities and functionalities of a particular output device such as a printer. An output device object may be

stored in the memory component of an output device. As described below in greater detail, an information apparatus requesting output service may communicate with an output device. During such local service negotiation, at least a partial output device object may be uploaded to the information  
5 apparatus from the output device. By obtaining the output device object (or printer object in the case of a printer), the information apparatus may learn about the capability, compatibility, identification, and service provided by the output device.

As an example, an output device object or printer object may  
10 contain one or more of the following fields and or attribute descriptions. Each of following fields may be optional, and furthermore, each of the following fields or attributes may or may not exist in a particular implementation (e.g., may be empty or NULL).

- 15 • Identification of an output device (e.g., brand, model, registration, IP address etc.)
- Services and feature sets provided by an output device (e.g., color or grayscale output, laser or inkjet, duplex, output quality, price per page, quality of service, etc.)
- 20 • The type of input languages, formats, and or output data (e.g., PostScript, PCL, XML, RTL, etc.) supported by an output device.
- Device specific or dependent profiles (e.g., output device profiles, printer profiles, color profiles, halftoning profiles, communication profiles etc.). Device profiles may include information such as  
25 color tables, resolution, halftoning, dpi (dots-per-inch), bit depth, page size, printing speed, etc. One or multiple profiles may exist.
- Payment information on a plurality of services provided by an output device.
- Information or security requirements and type of authentication an  
30 output device supports.
- Date and version of the output device object (e.g., printer object).
- Software components containing algorithms or instructions or data, which may be uploaded to run in an information apparatus, as described with reference to Fig. 1. For example, a graphical

5 user interface (GUI) software component may be uploaded to an information apparatus. The software component may be incorporated into or launched in the information apparatus by a client application of present invention to capture a user's preferences (e.g., print quality, page layout, number of copies, number of card per page, etc.). The client application may capture these user preferences and create a job object, as described below.

10 • Pointer or reference to any one or more output device parameters (output device parameters include one or more of the above described output device object fields and or attribute descriptions). For example, a more up-to-date or original version of output device parameters may sometimes be stored in a network node. An output device or may include pointer or pointers to these output device parameters.

15 • Pointer or reference to another object or objects, including output device object, job object (described below) or document object.  
Job Object

20 A job object may contain attributes and information that describe an output job. A user may provide some or all of these attributes, preferences and or information about the output job consciously by, for example, specifying his/her preference through a GUI or through defaults in his/her information apparatus. Alternatively or in combination, a job object may be obtained without active user intervention. In one instance, default parameters may be provided, obtained, negotiated or calculated without user knowledge.

25 Examples of attributes and information contained in a job object may include one or more of the following, among others. Each of following fields may be optional, and furthermore, each of the following fields or attributes may or may not exist in a particular implementation (e.g., may be empty or NULL):

30 • Preferences such as print quality, page layout, number of pages, number of cards per page, output size, color or grayscale, among others.

- Information on security, authentication, payment, subscription, identification among others.
- Information on priority or quality of service.
- Status information of the output job or process.
- 5     • Job instructions such as queuing, cancellation, execution, output priority among others.
- Version or date of the job object.
- Sets of default parameters or instructions. The defaults may be stored in an output device, in the information apparatus, or in any
- 10     network nodes.
- Pointer or reference to any one of the above mentioned information, instructions, preferences and defaults.
- Pointer or reference to another object or objects.

#### Document Object

- 15             A document object may contain attributes and fields that describe a digital document and or reference or references to digital document or documents. The term digital document as used herein may refer to any digital content or data content that an output device may output. A digital document may contain text, graphics, image, sound, voice, forms, and video, among other
- 20     content types. Examples of a digital document may be any one or combination of file types: HTML, VHTML, PostScript, PCL, XML, PDF, MS Word, PowerPoint, JPEG, MPEG, GIF, PNG, WML, VWML, CHTML, HDML, ASCII, 2-byte international coded characters, etc. A digital document can be composed of any format, language, encoding, data or combination, and the digital
- 25     document may be partially or totally proprietary or otherwise. A digital document may be used interchangeably with the term output content or data content in the descriptions of present invention.

- A document object may contain one or more of the following attributes, fields, or descriptions. Each of the following fields may be optional,
- 30     and furthermore, each of the following fields or attributes may or may not exist in a particular implementation (e.g., may be empty or NULL).

- The actual digital document or output content.

- A pointer or reference to a digital document or output content and or instructions of where a digital document can be found and or retrieved. A digital document may be located in a user's information apparatus, in an application, or anywhere in a network node (e.g., in a content or file server). Using a pointer or reference to a digital document may reduce the size of the document object. Therefore, this may be beneficial, for example, when passing or uploading a document object from information apparatus to server application through a narrow bandwidth communication link.
- Date and version of the digital document.
- A history with the dates and descriptions of any changes, modifications, and updates made to the document since its creation.
- Descriptions and instructions for viewing, obtaining, opening, interpreting, encoding, decoding, compressing, decompressing, rendering, converting, describing, processing, and manipulating the digital document.
- Status and state of the digital document. For example, one of the fields may provide priority or instructions of when or where to use the reference to digital document or the actual digital document itself if they are both contained in a document object.
- Pointer or reference to another object or objects.

Fig. 1 is a block diagram of a pervasive output system 98 that can implement the process and apparatus of present invention. In one implementation, electronic system 98 includes an information apparatus 100, an application server 110 and a content server 114 (sometimes referred to as "network nodes") that are connected together through network 108. Electronic system 98 may also include an output device 106 that communicates with information apparatus 100 through a communication link 116.

Network 108 generally refers to any type of wire or wireless link between multiple computing devices. Examples of network 108 may include, but are not limited to, a local area network (LAN), a wide area network (WAN), or a combination of networks. In one embodiment of the present invention, network 108 may include the Internet. In another embodiment, network 108

may contain multiple networks, including local area networks or wide area networks such as the Internet.

Information apparatus 100 is a computing device with processing capability. In one embodiment, information apparatus 100 may be a mobile  
5 computing device such as palmtop computer, handheld device, laptop computer, personal digital assistant (PDA), smart phone, screen phone, e-book, Internet pad, communication pad, Internet appliance, pager, digital camera, etc. It is possible that information apparatus 100 may also include a static computing device such as a desktop computer, workstation, server, etc.

10 Information apparatus 100 may contain components (not shown) such as a processing unit, a memory unit, a storage unit and an input/output control unit. Information apparatus 100 may also contain an interface (not shown) for interactions with users. The interface may be implemented in software or hardware or a combination. Examples of such interfaces include,  
15 without limitation, one or more of a mouse, a keyboard, a touch-sensitive or non-touch-sensitive screen, push buttons, soft keys, a stylus, a speaker, a microphone, etc.

Information apparatus 100 typically contains at least one network communication unit that interfaces with other electronic devices such as other  
20 nodes in network 108 or output device 106. The network communication unit may be implemented with hardware (e.g., silicon chipsets, antenna), software (e.g., protocol stacks, applications) or a combination. Sometimes an information apparatus 100 may contain more than one communication unit in order to support different interfaces, protocols, and or communication standards  
25 with different devices and or network nodes. For example, information apparatus 100 illustrated in Fig. 1 may communicate with output device 106 through a Bluetooth standard interface while communicating with other network nodes (e.g., content server 114 or application server 110) through a cellular telephone modem interface.

30 Information apparatus 100 may be coupled to network 108 through wired or wireless connections, or a combination of them. As an example, information apparatus 100 may subscribe to a wireless data network in which packet data is transmitted through, for example, radio links between information

apparatus 100 and a plurality of base stations. A wireless communication connection may include a cellular telephone communication channel. As another example, information apparatus 100 may be connected to network 108 through wired lines such as, without limitation, telephone lines, Ethernet, WAN  
5 links (e.g., T1, T3, 56kb, X.25) or broadband connections (e.g., ISDN, Frame Relay and ATM), among others.

In one embodiment of present invention, interface 116 between information apparatus 100 and output device 106 is a wireless interface. As an example, the wireless interface may be a short-range radio interface such as  
10 those implemented according to the Bluetooth or IEEE 802.11 standard. However, the interface may be realized by other means of wireless communication such as radio, infrared, ultrasonic or hydrophonic among others. The HomeRF Shared Wireless Access Protocol (SWAP) and one of many standards for cellular communication may constitute alternatives to the  
15 Bluetooth standard. Wired line connections such as serial or parallel interface, USB interface and fire wire (IEEE 1394) interface, among others, are also possible. Connection to a local network such as an Ethernet or a token Ring network, among others, may also be implemented in the present invention for local communication between information apparatus 100 and output device 106.  
20 Exemplary hardware components of communication units that may be used to implement wireless interface between the information apparatus 100 and output device 106 are described below with reference to Figs. 2A and 2B.

Information apparatus 100 may be a dedicated device (e.g., email terminal, web terminal, digital camera, e-book, web pads, internet appliances  
25 etc.) with functionalities that are pre-configured by manufacturers. Alternatively, information apparatus 100 may allow users to install additional hardware components and or application software to expand its functionality.

Information apparatus 100 may contain a plurality of applications to implement its feature sets and functionalities. As an example, a document  
30 browsing application 103 may be implemented to help a user view and perhaps edit, partially or entirely, digital documents written in certain format or language (e.g., Page description language, markup language, etc.). Digital documents may be stored locally in the information apparatus 100 or in a network node



(e.g., in content server 114). An example of a document browsing application is an Internet browser such as Internet Explorer, Netscape Navigator, or a WAP browser. Such browsers may use one or more standard protocols (e.g., HTTP, WAP, web clipping, I-Mode, etc.) to retrieve and display digital content written in mark-up languages such as HTML, WML, XML, CHTML, HDML, among others. Other software applications may also constitute examples of the document browsing application of the present invention. For example, a document editing software such as Microsoft Word™ also allows users to view and edit digital documents that have various file extensions (e.g., doc, rtf, html, XML etc.) whether stored locally in the information apparatus or in a network node.

In some instances restrictions may be imposed on the format or size of digital content that may be transmitted to information apparatus 100, such as when information apparatus 100 has limited processing power, screen size, memory space, or a limited application, or when bandwidth is a valuable resource in the transmission link to information apparatus 100 (such as in some wireless data network). As a result, there are situations where a user may not be able to view on information apparatus 100 the full content of a digital document in its original form using a document browsing application. For example, some images, tables, graphics, fonts and formats in a digital document may be “clipped” out or completely or partially altered from the original content before or during the transmission process. Such restrictions may be, sometimes, imposed by a service providing the content, or by the application rendering the content, or by the user to avoid slow transmission etc.

To address the difficulties described above, information apparatus 100 includes a pervasive output client application 102 that provides pervasive output capability of the present invention. Client application 102 may include software and data that can be executed by the processing unit of information apparatus 100. Client application 102 may be implemented as a stand-alone software application or as a part or feature of another application software, or in the form of device driver, which may be invoked, shared and used by other application software. Pervasive output client application 102 may also have means to invoke other applications (e.g., a document browsing application, a communication manager, etc.) to provide certain feature sets, as described

below. Client application 102 may be variously implemented in an information apparatus 100 and may run on different operating systems or platforms. As an example, client application 102 may include one or more of the following functionalities:

- 5           • Obtain output device object as a result of communication or negotiation with output device 106.
- Obtain document object (1) from user input or selection, or (2) from other applications (e.g., a document browsing application) residing in the information apparatus 100.
- 10          • Coordinate with a server application 112 residing in application server 110 to manage the process of communication and transmission of objects or data to and from application server 112.
- Coordinate with output device 106 that include an output controller 104 to manage the process of transmitting output data (or print data in the case of printers) received from the server application 112 for output.
- 15

The client application may also optionally comprise one or more of the following functionalities:

- 20           • Communicate directly or indirectly (such as through an operating system or component or object model or message, etc.) with other applications residing in the same information apparatus 100 to obtain objects, data, and or content needed, or relating to the pervasive output process of present invention.
- Directly or indirectly manage and utilize functionalities provided by hardware components residing in its host information apparatus such as the communication unit, storage unit, memory unit, etc.
- 25           • Provide a graphical user interface (GUI) in its host information apparatus 100 to interact with user.
- Obtain job object. Job object may be obtained (1) by user input through a GUI, or (2) by using default values stored in a network node or in the output device, or (3) the combination of the above. Default values may be pre-set or may be obtained calculated or generated by the client application as result of communication or negotiation
- 30

between client application 102, output device 106 and or server application 112.

- Launch or provide an interface, session or emulation for server application 112.
- 5     • Further process output data or print data received from server application 112 before sending the data to output device 106 for final output. The processing may include converting the output data into a form (e.g., format, language, or instruction) more acceptable to or compatible with the associated output device 106. The processing
- 10     may also include at least in part one or more raster image processing operations such as rasterization, scaling, color management, color conversion, halftoning, compression, decompression, etc.
- Launch, invoke, integrate or involve a helper application to assist at least in part in the processing of the output data.

15             The above functionalities and process of pervasive output client application 102 are described in further detail in the pervasive output process with reference to Fig. 4.

Output device 106 is an electronic system capable of outputting digital content or data content regardless of whether the output medium is a

20     substrate (e.g., paper), display, projection, or sound. A typical example of output device 106 may be a printer, which outputs digital documents containing text, graphics, image or any combination onto a substrate. Output device 106 may also be a display device capable of displaying still images or video, such as, without limitation, televisions, monitors, and projectors. Output device 106

25     can also be a device capable of outputting sound. Any device capable of playing or reading digital content in audio (e.g., music) or data (e.g., text or document) formats is also a possible output device 106. A printer (including a fax machine, copier, etc.) is frequently referred to herein as the exemplary output device 106. However, it should be recognized that the present invention

30     applies also to output device 106 other than printers.

Outputting a data content or output content at an output device (e.g. printers, display devices, projection devices, sound output devices etc.) includes rendering the output content on a specific output medium (e.g., papers,

display screens etc). For example, rendering an output content at a printer generates image on a substrate; rendering an output content at a display device generates image on a screen; and rendering an output content at an audio output device generates sound.

5                   A conventional printing system includes three basic components: a raster image processor, a memory buffer, and a marking engine. The raster image processor converts digital content into a raster suitable for printing; the memory buffer holds the rasterized image ready for printing; and the marking engine transfers colorant to a substrate (e.g., paper).

10                   Marking engine may use any of a variety of different technologies to transform a rasterized image to paper or other media or, in other words, to transfer colorant to a substrate. The different marking or printing technologies that may be used include both impact and non-impact printing. Examples of impact printing may include dot matrix, teletype, daisywheel, etc. Non-impact  
15                   printing technologies may include inkjet, laser, electrostatic, thermal, dye sublimation, etc.

                  The marking engine and memory buffer of a printer form its printer engine, which may also include additional circuitry and components, such as firmware, software or chips or chipsets for decoding and signal conversion, etc.  
20                   Input to a printer engine is usually a final rasterized print data that is generated by the raster image processor. Such input is usually device dependent and printer specific. The printer engine may take this device dependent input and generate output pages.

                  Fig. 10A illustrates an exemplary block diagram of one  
25                   conventional printing system or printer 1000A that includes a printer controller 1010, a memory buffer 1004, and a marking engine 1006. The printer controller 1010 includes an interpreter 1001 and a raster image processor 1002.

                  The Raster image processor (RIP) may be located within an output device itself (as shown by raster image processor 1002 in Fig. 10A) or  
30                   externally implemented as hardware, software, or a combination (not shown). As an example, RIP may be implemented in a software application or device driver in the information apparatus 100. A RIP may also reside within a printer controller 1010 (as shown by raster image processor 1002 in Fig. 10A), a print

server or an output controller 104 of present invention. Examples of raster image processing operations may include image and graphics interpretation, rasterization, scaling, segmentation, color space transformation, image enhancement, color correction, halftoning, compression etc.

5                   When a RIP 1002 is located inside an output device 106, the RIP 1002 is usually included in a printer controller 1010 (as shown in Fig. 10A). A printer controller 1010 may interpret, convert or rasterize input print data in the form of a page description language (e.g., PostScript, PCL), markup language (e.g., XML) or other special document format or language into a final format,  
10   language or instructions that printer engine 1008 can understand.

                  A variety of other page description languages, markup languages, image formats, graphic formats, and file formats may be used as input print data to a printer 1000A or output device 106. Examples of possible inputs other than PostScript and PCL may include without limitation, EMF, XML, HTML, among  
15   many others. Some printer manufacturers may also employ a combination of proprietary or non-proprietary page description languages, markup languages, file formats, graphics and image formats, color spaces, metafiles, encoding, decoding, compression or decompression etc. for the print data. The print data sent to a printer with printer controller 1010 is usually an intermediate  
20   description of a digital document that may require further interpretation, processing or conversion before the print data can be sent to a printer engine 1008 for output. A printer controller 1010 may interpret and process the input intermediate print data into a final format that can be understood by the printer engine 1008. Regardless of the type of print data, conventionally, a user may  
25   need a device-specific driver in his or her information apparatus 100 in order to output the proper language, format, or file that can be accepted by a specific printer or output device 106

                  Fig. 10B shows another exemplary conventional output system or an output device 1000B. An output system or output device may include one or  
30   more of a printing system or device, a display system or device, a projection system or device, or a sound system or device. In the case that the output system or device is a printer, the printer with reference to Fig. 10A does not have a printer controller 1010. A typical example of printer 1000B is a lower-

cost inkjet printer. RIP operations in this example may be implemented in a software application or device driver in an information apparatus 100 that outputs to such a printer 1000B. Conventionally, a device-specific driver or application may need to reside in the information apparatus 100 to rasterize and  
5 convert the digital document from its original format into final print data (for example a compressed CMKY data with one or more bits per pixel) that can be understood by a particular printer engine 1008B.

Regardless of type or sophistication level, different output devices  
106 conventionally need different printer drivers or output management  
10 applications in the information apparatus 100 to provide output capability. Some mobile devices may have limited memory and processing power to store or process multiple device drivers. It may also be infeasible to install or preinstall multiple device dependent or specific printer drivers in such mobile devices. In pervasive output operations of the present invention described  
15 below, various device specific drivers or applications may be available and may be executed completely or partially in a remote application server 110, thereby reducing the workload of information apparatus 100 and realizing device-independent pervasive output.

In one implementation, output device 106 includes at least a  
20 communication unit or adapter to interface with information apparatus 100, as described below in greater detail. Output device 106 may sometimes include more than one communication unit in order to support different interfaces, protocols, or communication standards with different devices. For example, output device 106 may communicate with a first information apparatus 100  
25 through a Bluetooth interface while communicating with a second information apparatus 100 through a parallel interface, and so on. Exemplary hardware components of a wireless communication unit are described below with reference to Figs. 2A and 2B.

Output device 106 may also include an output controller 104 to  
30 help manage communication and negotiation processes with information apparatus 100. Output controller 104 may be dedicated hardware or software or combination of both for at least one output device 106. Output controller 104 may also be integrated, installed, or connected externally to one or more output

devices 106. In such cases the output controller 104 may sometimes be referred to as print server or output server.

The difference between output controller 104 and printer controller 1010 should be noted. Printer controller 1010 and output controller 104 are both controllers and are both dedicated hardware and or software for at least one output device 106. Output controller 104 refers to a controller with feature sets, capabilities, and functionalities of the present invention. Printer controller 1010 may contain functions such as interpreting an input page description language, raster image processing, and queuing, among others. Output controller 104 may also contain partially or all the features of a printer controller 1010, plus the feature set, functionalities, capabilities, and processes of present invention.

In one embodiment, output controller 104 does not include a communication unit, but rather utilizes or manages a communication unit residing in the associated output device 106. In another embodiment, output controller 104 may include or provide a communication unit to output device 106. For example, an output controller 104 with a wireless communication unit may be installed internally or connected externally to a legacy printer to provide it with wireless communication capability that was previously lacking.

Figs. 3A-3C show exemplary implementations of output controller 104 to illustrate that it may be implemented in a variety of ways. The output controller 104 may be connected externally to an output device 106 or integrated internally into the output device 106. Fig. 3A shows that output controller 104 may be implemented as a circuit board or a card that is installed inside an output device 106 and may include software, hardware, or both. Fig. 3C shows that output controller 104 may be implemented as an external box or station that is wired or wirelessly connected to an output device 106. Such an external box or station may contain its own user interface. One example of such an implementation is a print server connected to an output device 106. Fig. 3B shows another configuration in which the functionalities of output controller 104 may be integrated into an existing printer controller 1010 (referred to as "combined controller") which can be internally or externally (not shown) connected to output device 106. A combined controller 104B has

functionalities of both printer controller 1010 (e.g., input interpretation and raster image processing) and output controller 104 of the present invention. Under this configuration, the functionalities of output controller 104 and printer controller 1010 may share the same resources, such as processing unit,

5 memory unit, etc.

Other possible implementations of output controller 104 may include, for example, a conventional personal computer (PC), a workstation, and an output server or print server. In these cases, the functionalities of output controller 104 may be implemented using application software installed in a computer (e.g., PC, server, or workstation), with the computer connected with a  
10 wired or wireless connection to an output device 106. Using a PC, server, workstation, or other computer to implement the feature sets of output controller 104 with application software is just another possible embodiment of the output controller 104 and in no way departs from the spirit, scope and process of the  
15 present invention.

Regardless of its manner of implementation, the output controller 104 will usually include hardware, software, or a combination. For example, an output controller 104 may include components using one or more or combinations of an application-specific integrated circuit (ASIC), a digital signal  
20 processor (DSP), a field programmable gate array (FPGA), firmware, system on a chip, and various communication chip sets. Output controller 104 may also contain embedded processors with software components or embedded application software to implement its feature sets, and functionalities.

Output controller 104 may contain an embedded operating  
25 system. With an operating system, some or all functionalities and feature sets of the output controller 104 may be provided by application software managed by the operating system. Additional application software may be installed or upgraded to newer versions in order to, for example, provide additional functionalities or bug fixes.

30 Output controller 104 typically includes a memory unit, or may share a memory unit with, for example, printer controller 1010. The memory unit, such as ROM, RAM, flash memory and disk drive among others, may provide persistent or volatile storage. The memory unit may store objects,



codes, instructions or data (collectively referred to as software components) that implement the functionalities of the output controller 104. Part of the software components (e.g., the printer object) may be uploaded to information apparatus 100 during a data output operation.

5                   Functionalities and components of output controller 104 for the purpose of providing pervasive output may include:

- Input components and operations for receiving service requests from a plurality of information apparatuses 100.
- Storage components and operations for storing partial or the entire  
10                   printer or output object in a memory component.
- Transmission components and operations for transmitting partial or the entire printer or output object to the information apparatus 100 requesting pervasive output service. The output controller 104 may transmit the output device object in one or multiple sessions.
- 15                   • Receiving components and operations for receiving output data (e.g., print data) from information apparatus 100 and sending the data to output device 106 or output engine (or printer engine) 1008.

In addition to the above functionalities, output controller 104 may further optionally include one or more of the following:

- 20                   • Response components and operations to respond to service request from an information apparatus 100 (e.g., in a discovery process, described below) by providing at least a partial output device object (e.g., printer object for printers).
- Broadcast components and operations to broadcast or advertise the  
25                   services provided by a host output device 106 to an information apparatus 100 that may request such services.
- Payment components and operations for implementing payment processing and management functions by, for example, calculating and processing payments according to the services requested or  
30                   rendered to a client (information apparatus 100).
- Components and operations for implementing job management functionalities such as queuing and spooling among others.

- User interface components and operations for providing a user interface (e.g., display screen, touch button, soft key, etc.) when it is implemented as an external box connected to an output device 106.
  - Security components and operations for implementing security or authentication procedures. For example, the output controller 104 may store in its memory component (or shared memory component) an access control list, which specifies what device or user may obtain service from its host (or connected) output device 106. Therefore, an authorized information apparatus 100 may gain access after confirming with the control list.
  - Processing components and operations to further process the output data. The processing of the output data may include converting the output data into a form (e.g., format, language, and or instruction) at least more acceptable to or compatible with the associated output device 106 or output engine or printer engine 1008. The processing may also include at least in part one or more raster image processing operations such as rasterization, scaling, color management, color conversion, halftoning, compression, decompression etc.
- When output controller 104 is implemented as firmware, or an embedded application, the configuration and management of the functionalities of output controller 104 may be optionally accomplished by, for example, using controller management software in a host computer. A host computer may be a desktop personal computer (PC), workstation, or server. The host computer may be connected locally or through a network to the output device 106 or the controller 104. Communication between the host computer and the output controller 104 can be accomplished through wired or wireless communication. The management application software in the host computer can manage the settings, configurations, and feature sets of the output controller 104.
- Furthermore, host computer's configuration application may download and or installed application software, software components and or data to the output controller 104 for the purpose of upgrading, updating, and or modifying the features and capabilities of the output controller 104.

Output device 106 in one implementation includes or is connected to output controller 106 described above. Therefore, functionalities and feature sets provided by output controller 106 are automatically included in the functionalities of output device 106. The output device 106 may, however,  
5 implement or include other controllers and/or applications that provide at least partially the features and functionalities of the output controller 104.

Therefore, the output device 106 may include some or all of the following functionalities:

- 10 • Components and operations to receive multiple service requests or queries (e.g., a service request, a data query, an object query etc.) from a plurality of information apparatus 100 and properly respond to them by returning software components, which may contain data, codes, instructions and/or objects.
- 15 • Components and operations to receive, from information apparatus 100 device-specific output data containing the digital document intended for output.
- Components and operations to output final output data or print data on a substrate or in another medium such as display screen.

20 An output device may further comprise optionally one or more of the following functionalities:

- Components and operations for establishing and managing a communication link with an information apparatus 100 requesting service;
- 25 • Components and operations to store and/or further process input print data or output data.
- Components and operations for storing partial or the entire output device object (e.g. printer object) in a memory component.
- Components and operations to advertise or broadcast services provided or available to an information apparatus 100 that may  
30 request such services.
- Components and operations for implementing payment processing and management functions by, for example, calculating and

processing payments according to the services requested by or rendered to a client (information apparatus 100).

- Components and operations for implementing job management functionalities such as queuing and spooling among others.
- 5   • Components and operations for providing a user interface (e.g., display screen, touch button, soft key, power switch, etc.).
- Components and operations for implementing security or authentication procedures. For example, the output device 106 may store in its memory component (or a shared memory component) an access control list, which specifies what device or user may obtain  
10   service from it. Therefore, an authorized information apparatus 100 may gain access after confirming with the control list.
- Components and operations to process the output data. The processing of the output data may include converting the output data  
15   into a form (e.g., format, language, and or instruction) more acceptable or compatible to the associated printer controller 1010, output engine or printer engine 1008. The processing may also include at least partially one or more raster image processing operations.
- 20       Application server 110 is a node on network 108. An application server 110 may include computing capability, data storage capability, and mechanisms for servicing requests from a plurality of client computers (referred to as clients), including the information apparatus 100, needing computational or data storage resources. A server typically includes processing unit, memory  
25   unit, storage unit, input/output control unit, and a communication unit, among others. Application server 110 may also include an interface to interact with users. The interface may be implemented with, for example, display screen, touch-sensitive screen, keyboard, mouse, stylus, push button, microphones and speakers among others.
- 30       Application server 110 preferably includes at least an operating system for supporting a plurality of application software to implement the functionalities of the application server 110 and to provide services to its clients (e.g., information apparatus 100). To provide services to multiple clients at the

same time, the application server 110 may run a multi-user operating system that enables multiple concurrent users to log on and run applications in separate, protected sessions.

Application server 110 typically includes a server application 112 that may include software and data to be executed in the processing unit of a server node. The server application 112 may include one or more of the following functionalities:

- Components and operations to receive data and/or objects (with at least a output device object and a document object) from client application 102.
- Components and operations to process the objects received to generate device-dependent output data acceptable to one or more output devices 106 selected by a user. The server application 112 may perform the processing function independently or in combination with other applications.
- Components and operations to transmit output data back to the client application 102.

The server application 112 may optionally include one or more of the following functionalities:

- Components and operations to obtain digital document (output content) from other network node if it is not included or completely included in the document object received from client application 102.
- Components and operations to obtain output device parameters if they are not included or completely included in the output device object received from client application 102.
- Components and operations to obtain job object or relating parameters if it is not included or completely include in the composite message received from client application 102. The server application 112 may obtain job object by querying user or by assuming default values. For example, if a user did not specify print or output range, the server application 112 may assume the default by printing or outputting all pages.

- Components and operations to manage and coordinate communication with an information apparatus 100 requesting output service.
- 5     • Components and operations to identify, invoke and or incorporate appropriate applications (residing in the application server 112 or in other network nodes) to help interpret and or process the digital document obtained and generate output data. The processing of the digital document may include converting the digital document into an output data related at least in part to the output device object. The  
10     processing may also include at least in part one or more raster image processing operations such as rasterization, scaling, color management, color conversion, halftoning, compression, decompression, etc.
- 15     • Components and operations to interact with (e.g., store, update, verify, etc.) one or more databases that store profiles of information apparatuses 100 and/or users who have subscribed to output service provided by the server application 112.
- 20     • Components and operations to implement an independent computing architecture where the execution of the server application 112 may occur entirely in the application server 110. The GUI of the application 112, keystrokes and mouse clicks are transmitted over the network 108 to and from the client such as a user's information apparatus 100.

25     It should be noted that, in the example shown here, server application 112 is illustrated as the only application in application server 110. But in actuality, more than one application may exist in the application server 110 and the applications may provide various services to different clients. It is also possible that the functionalities and feature sets of the server application 112 may be implemented with multiple applications residing in the same server,  
30     multiple servers (e.g., in a server farm), or network nodes or combination.

Content server 114 may represent one of a plurality of server nodes on network 108 that may store digital documents 116. The digital documents stored in content server 114 may be viewed or edited by a user

using an information apparatus 100. As an example, the content server 114 may be a web server that hosts a plurality of web pages written in mark up languages such as HTML, WML, XML, HDML, CHTML, among others. A user may view web pages using an Internet browsing application such as Internet Explorer or Netscape Navigator, a WAP browser, etc. As another example, the content server 114 may be a file server that allows multiple clients to store and share digital files with appropriate security or authentication procedures. These digital files or documents may contain one or more of image, text, graphics, sound and video. The files may be saved in various file formats (e.g., MS Word, Excel, PowerPoint, PDF, Postscript, JPEG, GIF, MPEG, etc.). A user may need to have appropriate application on his/her information apparatus 100 to access, view and edit these files.

It should be noted that in Fig. 1 content server 114 and application server 110 are shown as distinct server nodes. However, it is possible that application server 110 and content server 114 belong to the same domain, or the functionalities of these two servers may be implemented with different applications executed in a single network node or server.

Further description of the functionalities and feature sets of different devices and applications illustrated in Fig. 1 is provided below in reference to a pervasive output process shown in Fig. 4.

Figs. 2A and 2B are block diagrams illustrating two exemplary configurations of hardware components of wireless communication units. Referring to Fig. 2A, a radio adapter 200 may be implemented to enable data/voice transmission among devices (e.g., information apparatus 100 and output device 106) through radio links. A RF transceiver 214 coupled with antenna 216 is used to receive and transmit radio frequency signals. The RF transceiver 214 also converts radio signals into and from electronic signals. The RF transceiver 214 is connected to a RF link controller 210 by an interface 212. The interface 212 may perform functions such as analog-to-digital conversion, digital-to-analog conversion, modulation, demodulation, compression, decompression, encoding, decoding, and other data or format conversation functions.

RF link controller 210 implements real-time lower layer (e.g., physical layer) protocol processing that enables the hosts (e.g., information apparatus 100, output controller 104, output device 106, etc.) to communicate over a radio link. Functions performed by the link controller 210 may include, without limitation, error detection/correction, power control, data packet processing, data encryption/decryption and other data processing functions.

A variety of radio links may be utilized. A group of competing technologies operating in the 2.4 GHz unlicensed frequency band is of particular interest. This group currently includes Bluetooth, Home radio frequency (Home RF) and implementations based on IEEE 802.11 standard. Each of these technologies has a different set of protocols and they all provide solutions for wireless local area networks (LANs). Interference among these technologies could limit deployment of these protocols simultaneously. It is anticipated that new local area wireless technologies may emerge or that the existing ones may converge. Nevertheless, all these existing and future wireless technologies may be implemented in the present invention without limitation, and therefore, in no way depart from the scope of present invention.

Among the current available wireless technologies, Bluetooth may require relatively lower power consumption. Bluetooth has its own protocol stack and is designed for short range (10 meters), point-to-multipoint voice and data transfer. It is based on a frequency-hopping version of spread spectrum. Seventy-nine hop frequencies are utilized beginning at the lowest frequency of 2402 MHz and each of the 79 hop frequencies is 1 MHz above the next lower frequency. Bluetooth-enabled devices operate in piconets, in which several devices, using the same hopping pattern or sequence, are connected in a point-to-multipoint system (piconet). There is one device (master) in each piconet that determines how the bandwidth is allocated to other devices (slaves). As many as 10 piconets of 8 devices each can operate simultaneously.

Referring to Fig. 2B, one or more infrared (IR) adapters 220 may be implemented to enable data transmission among devices through infrared transmission. The IR adapters 220 may be conveniently implemented in accordance with the Infrared Data Association (IrDA) standards and specifications. In general, the IrDA standard is used to provide wireless



connectivity technologies for devices that would normally use cables for connection. The IrDA standard is a point-to-point (vs. point-to-multipoint as in Bluetooth), narrow angle, ad-hoc data transmission standard designed to operate over a distance of 0 to 1 meter and at speeds up to 4 Mbps.

5 Configuration of infrared adapters 220 may vary depending on the intended rate of data transfer. Fig. 2B illustrates one embodiment of infrared adapter 220. Transceiver 226 receives/emits IR signals and converts IR signals to/from electrical signals. A UART (universal asynchronous receiver/transmitter) 222 performs the function of serialization/deserialization, converting serial data  
10 stream to/from data bytes. The UART 222 is connected to the IR transceiver 226 by encoder/decoder (ENDEC) 224. This configuration is generally suitable for transferring data at relatively low rate, for example 115.2 kbps or below. Other components (e.g., packet framer, phase-locked loop) may be needed for higher data transfer rates.

15 Figs. 2A and 2B illustrate exemplary hardware configurations of wireless communication units. Such hardware components may be included in devices (e.g., information apparatus 100, output controller 104, output device 106, etc.) to support various wireless communications standards. Wired links, however, such as parallel interface, USB, Firewire interface, Ethernet and token  
20 ring networks may also be implemented in the present invention by using appropriate adapters and configurations.

Figs. 3A-3C illustrate various configurations and implementations of output controller 104.

In the configuration illustrated by Fig. 3A, output controller 104A  
25 may be installed, for example as one or more boards or cards containing both hardware and software, inside output device 106(A). The output device 106(A) may or may not have inside it a printer controller 1010 (Fig. 10). In the case that output device 106(A) includes a printer controller 1010 (not shown), the output controller 104 may co-exist with the printer controller 1010 and other  
30 components of the output device 106(A). One example of this implementation is to connect or cascade output controller 104A sequentially or serially with the printer controller 1010.

In another implementation shown by Fig. 3B, the functionalities of output controller 104 and printer controller 1010 (Fig. 10) may be combined into a single controller, sometimes referred to as combined controller 104(B). The combined controller 104(B) may be implemented, for example, as one or more  
5 boards or cards containing both hardware and software, inside output device 106(B). This implementation may help to reduce the cost of material when compared to implementing two separate controllers. As an example, the combined controller 104(B) may share common processors, memories, and storage units to run the applications and functionalities of the two types of  
10 controllers and, therefore, may have lower component cost. The combined controller can also be implemented as an external box or station (not showed) connected to the output device 106. This connection could be wired or wireless.

In the third implementation shown in Fig. 3C, the output controller 104C may be implemented in a separate box or server or station connected  
15 externally to output device 106C. The communication link between output controller 104C and output device 106C may be a wired or wireless link. The output device 106C may or may not have inside it a printer controller 1010 (Fig. 10). If the output device 106C does not contain a printer controller 1010 inside, the externally connected output controller 104C may optionally contain the  
20 functionalities of printer controller 1010 and therefore, provide raster image processing capability as an additional feature.

The above are exemplary implementations and configurations of output controller 104. Other implementations are also possible. For example, partial functionalities of output controller 104 may be implemented in an external  
25 box or station while the remaining functionalities may reside inside an output device 106 as a separate board or integrated with a printer controller 1010. As another example, the functionalities of output controller 104 may be implemented into a plurality of external boxes or stations connected to the same output device 106. As a further example, the same output controller 104 may  
30 be connected to service a plurality of output devices 106. Various implemented output controllers 104 should not depart from the spirit and scope of the present invention provided that they all support the functionalities and feature sets described herein.

Fig.4 is a flow diagram of a pervasive output process 401 of the present invention. Pervasive output process 401 allows an information apparatus 100 to output digital content or document in its original form to an output device 106 regardless of processing power, display screen size, or memory space of information apparatus 100. Pervasive output process 401 may include or utilize:

- A client application 102, in an information apparatus 100, obtaining objects; with at least one object including a document object and another object including an output device object (or printer object in the case of a printer);
- A client application 102 transmitting objects to a server application 112;
- A server application 112 obtaining and processing the document object and converting it into output data, reflecting at least in part a relationship to said output device object;
- A server application 112 transmitting output data to the information apparatus 100 including a client application 102;
- The information apparatus 100 including a client application 102 transmitting output data to an output device 106;
- An output device 106 generating output with the output data.

Pervasive output process 401 may be initiated by a user in step 400. Typically, a user initiates output process 401 by invoking a client application 102 in his/her information apparatus 100. The client application 102 may be launched as an independent application or it may be launched from other applications 103 (such as from a document browsing, creating or editing application) or as part of or component of or a feature of another application 103 residing in the same information apparatus 100. When launched from another application 103, the client application 102 may obtain information, such as a partial or an entire document object, from that another application 103. This can be accomplished, for example, by one or combinations of messages or facilitated through an operating system or a particular object or component model etc. The client application maybe a device driver in this example.

During output process 401, a user may need to select one or more output devices 106 for output service. An optional discovery process step 404 may be implemented to help the user select an output device 106. During the discovery process step 404, a user's information apparatus 100 may (1) search  
5 for available output devices 106; (2) provide the user with a list of available output devices 106; and (3) provide means for the user to choose one or more output devices 106 to take the output job. An exemplary discovery process 404 is described below in greater detail with reference to Fig. 5.

The discovery process 404 may sometimes be unnecessary. For  
10 example, a user may skip the discovery process 404 if he or she already knows the output device (e.g., printer) 106 to which the output is to be directed. In this case, the user may simply connect the information apparatus 100 to that output device 106 by wired connections or directly point to that output device 106 in a close proximity such as in the case of infrared connectivity. As another  
15 example, a user may pre-select or set the output device or devices 106 that are used frequently as preferred defaults. As a result, the discovery process 404 may be partially or completely skipped if the default output device 106 or printer is found to be available.

In stage 406, the client application 102 may interact with output  
20 device 106, the user, and or other applications residing in the same information apparatus 100, to obtain (1) a document object, (2) an output device object and (3) any other optional objects such as a job object. These objects may be obtained sequentially, concurrently, or in any order. It should be noted that some of the objects or partial objects might have been acquired in prior steps.  
25 For example, the client application 102 may have obtained partially or entirely document objects or related information when the client application 102 was launched from or by another application. As another example, a partial output device object may have been uploaded to the information apparatus 100 during the optional discovery process 404. The client application 102 may create a  
30 composite message including these objects (document object, output device object and other optional objects) and transmit the composite message to server application 112 for processing, as described below in greater detail with reference to Fig. 6.

The server application 112, after receiving such a composite message from the client application 102, may in step 408 processes the document object or objects contained in the composite message and convert it or them into output data. Additional helper applications may be needed to help  
5 in this processing task. The processing and generation of output data may reflect at least in part a relationship to the output device object and or job object contained in the composite message received from client application 102. The output data generated may be transmitted back to the information apparatus 100, requesting output service or process 401 via network 108. An exemplary  
10 implementation of a server application process is described below with reference to Fig. 7.

In step 410, information apparatus 100 transmits output data, with or without further processing, to the selected output device 106 through a local communication link 116. Preferably, the output data is in a format or language  
15 acceptable to or compatible with the output device 106 selected by the user. When receiving output data from information apparatus 100, an output device 106 may simply buffer the output data before sending it to output engine (or printer engine) 1008 for final output. In cases where an output device 106 includes or is connected to a printer controller 1010, output controller 104 or a  
20 combined controller, such controllers may further process the output data received from information apparatus 100 before sending the output data to printer engine 1008 for final output. Further processing, if it exists, may include at least partially conversion operations and or raster image processing operations on the output data. The output controller 104 may also provide  
25 queuing or spooling or other job management features. An exemplary implementation of such an output process is described below with reference to Fig. 8.

The steps included in pervasive output process 401 may proceed automatically when a user requests output service. Alternatively, a user may be  
30 provided with options to proceed, cancel, or input information at each and every step. For example, after the client application process step 406 is finished, the user may be asked whether or not he or she wishes to continue to communicate with a remote application server. As another example, a user may cancel the

output service at any time by, for example, indicating a cancellation signal or command or by terminating the client application or by shutting down the information apparatus 100 etc.

A printer is used as a primary output device 106 in this example. It

- 5 should be recognized, however, that pervasive output process 401 described above can be similarly applied to other output devices such as fax machines, digital copiers, display screens, monitors, televisions, projectors, voice output devices, among others.

Fig. 5 is a flow diagram of an exemplary implementation of a  
10 discovery process 520, which may be an optional step to help a user locate one or more output devices 106 for an output job. The discovery process 520 may, however, be skipped partially or entirely. Implementation of discovery process 520 may require compatible hardware and software components residing in both the information apparatus 100 and the output device 106.

15 The discovery process 520 may include or utilize:

- A client application 102 in an information apparatus 100 communicating with available output devices 106 to obtain information such as partial or complete output device object or objects.
- 20 • A client application 102 that provides to the user information on each available and or compatible output device 106.
- User selection or determination by a client application 102 (automatically or not) of one or more devices 106 for output service from the available or compatible output devices 106.

25 Various protocols and or standards may be used during discovery process 520. Wireless communication protocols are preferred. Wired communication, on the other hand, may also be implemented. Examples of applicable protocols or standards may include, without limitation, Bluetooth, HAVi, Jini, Salutation, Service Location Protocol, and Universal Plug-and-play  
30 among others. Other proprietary protocols or combination may also be implemented in the discovery process 520. However, these different protocols, standards, or combination shall not depart from the spirit and scope of present invention.

In one implementation an application (referred here for simplicity of discussion as a "communication manager," not shown) residing in the information apparatus 100 helps communicate with output device 106, manage service requests and discovery process 520. The communication manager may  
5 be a part of or a feature of the client application 102. Alternatively or in combination, the communication manager may also be a separate application. When the communication manager is a separate application, the client application 102 may have the ability to communicate, manage or access functionalities of the communication manager.

10 The discovery process 520 may be initiated manually by a user or automatically by a communication manager when the user requests an output service with information apparatus 100.

In the optional step 500, a user may specify searching or matching criteria. For example, a user may indicate to search for color printers and or  
15 printers that provide free service. The user may manually specify such criteria each time for the discovery process 520. Alternatively or in combination, a user may set default preferences that can be applied to a plurality of discovery processes 520. Sometimes, however, no searching criteria are required - the information apparatus 100 may simply search for all available output devices  
20 106 that can provide output service.

In step 501, information apparatus 100 searches for available output devices 106. The searching process may be implemented by, for example, an information apparatus 100 multi-casting or broadcasting or advertising its service requests and waiting for available output devices 106 to  
25 respond. Alternatively or in combination, an information apparatus 100 may "listen to" service broadcasts from one or more output devices 106 and then identify the one or more output devices 106 that are needed or acceptable. It is also possible that multiple output devices 106 of the same network (e.g., LAN) register their services with a control point (not shown). A control point is a  
30 computing system (e.g., a server) that maintains records on all service devices within the same network. An information apparatus 100 may contact the control point and search or query for the needed services.

In step 502, if no available output device 106 is found, the communication manager may provide the user with alternatives 504. Such alternatives may include, for example, aborting the discovery process 520, trying discovery process 520 again, temporarily halting the discovery process  
5 520, or being notified when available output device 106 is found. As an example, the discovery process 520 may not detect any available output device 106 in the current wired/wireless network. The specified searching criteria (if any) is then saved or registered in the communication manager. When the user enters a new network having available output devices 106, or when new  
10 compatible output devices 106 are added to the current network, or when an output device 106 becomes available for any reason, the communication manager may notify the user of such availability.

In step 506, if available output devices 106 are discovered, the communication manager may obtain some basic information, or part of or the  
15 entire output device object, from each discovered output device 106. Examples of such information may include, but not limited to, device identity, service charge, subscription, service feature, device capability, operating instructions, etc. Such information is preferably provided to the user through the user interface (e.g., display screen, speaker, etc.) of the information apparatus 100.

20 In step 508, the user may select one or more output devices 106 to take the output job. If the user is not satisfied with any of the available output device 106, the user may decline the service. In this case, the user may choose to try again in step 510 with some changes made to the searching criteria. Alternatively, the user may choose to terminate the service request.

25 In step 512, with one or more output devices 106 selected or determined, the communication link between information apparatus 100 and the selected output device or devices 106 may be "locked". Other output devices 106 that are not selected may be dropped. The output process 520 may then proceed to a client application process 601 referenced in step 406 of Fig. 4.

30 Fig. 6 is a flow diagram of an exemplary client application process 601 that may include or utilize:



- A client application 102 that obtains an output object or objects as a result of communication and or negotiation with an output device 106.
- 5     • A client application 102 that obtains a document object (1) from user input or selection, or (2) from other applications (e.g., document browsing application) residing in the same information apparatus 100.
- 10    • A client application 102 that coordinates with server application 112 to manage the process of communication and transmission of a composite message (including at least a printer object and a document object) to the server application 112 for further processing.

Step 600 indicates that client application 102 obtains a document object. To assemble or create a document object, the client application 102  
15   may need to obtain output content (or a digital document) or pointers to the output content, or both. In cases where the output content is downloaded or partially downloaded to a user's information apparatus 100, the client application 102 may include both the output content and pointers to the output content in its document object. In cases where the output content is not  
20   downloaded to the information apparatus 100, the client application 102 may include only pointers to the output content in the document object.

There are various ways that a client application 102 may obtain a digital document or a pointer or reference to the digital document. In one embodiment, the client application 102 may provide a GUI with which a user can  
25   directly input the pointer or reference (e.g., URL, IP address, filename, path, etc.) of a digital document stored locally or in a network node. This manual process may be facilitated by, for example, providing a GUI with which users may select one or more pointers from a list of pointers or references of digital documents stored locally or in a remote network node. For instance, through a  
30   GUI provided by the client application 102, a user may see and select pointers of digital documents stored in a remote file server. In this case, the document object created by the client application 102 may contain only pointers or references to the output content.

In another embodiment, the client application 102 may obtain output content or pointer to output content from another application in the same information apparatus 100. As an example, a user may (1) launch the client application 102, and (2) invoke another application 103 (e.g., document editing and or browsing application) residing in the same information apparatus 100 to view or download the digital document. As another example, a user may (1) run another application 103 (e.g., document editing and or browsing application) residing in the same information apparatus 100 to view or download the digital document; and (2) launch or invoke the client application 102. In these cases, the client application 102 may communicate with another application 103 (e.g., document browsing application) to obtain pointers to the digital document and or the digital document itself (if it has been downloaded locally for viewing) to be included in document object.

It should be noted that the document object may have been partially or entirely obtained by the client application 102 in previous steps such as in step 400 of Fig. 4 in which the client application 102 is initiated. As an example, a user may (1) view or download a digital document (stored locally or in a network node) by using a document browsing application on the information apparatus 100, and (2) request output service by launching the client application 102 (as in step 400). The client application 102 may then communicate with the document browsing application to obtain the document object (including digital document and or pointers to the digital document). In this case, step 600 may be partially or entirely skipped.

In some instance such as in document browsing applications, a user may be limited to viewing or downloading only part of, or a reduced version of, the original digital document stored in a network node. This may be due to small screen size, limited bandwidth, memory size, and lack of application support, among other issues. In these cases, the client application 102 may allow the user to choose to output the original digital document or the reduced sized document. In the case of the original document, the document object created by the client application 102 may, for example, contain only references or pointers to the original output content stored in a server or network node. In the case where user wants to output the reduced version document that has

been downloaded locally, the client application 102 may include in the document object one or more of (1) the obtained reduced output content (2) the reference to the reduced content in the server or network node, and (3) pointer or pointers to the original output content.

5                   In another instance, for example, with a document browsing application, a user may see only the name or path to output content without being able to download or open it due to, for example, no compatible applications residing on the information apparatus 100, small display screen etc. According to the present invention, however, a user may still be able to output  
10 the original digital document by indicating to the client application 102 the pointer or reference of the output content. For example, the user may select or highlight the name or path of the output content through a GUI provided by the document browsing application. In this case, the document object created by the client application 102 may contain only pointers to the output content.

15                   A document object may also contain instructions. Instructions in an object may provide description, operation, and status information of the content or data of the document object, etc. For example, instructions may provide information about the changes or differences between an output content included in a document object relative to the original output content (stored in a  
20 network node) that is pointed to by the reference field in the document object. The output content included in a document object may be an edited or altered version while the output content referred to by the pointers may be the original version.

                  It should be noted that some output content may be publicly  
25 available to all users (e.g., generic web pages) while other output content may be restricted to one or a group of users (e.g., secure documents stored in a corporate network). In the latter case, authentication information such as a password, user name, id number, biometric information, digital certificate or security key, among others, may need to be provided to the server application  
30 112 for accessing and or fetching the digital document with reference to a pointer or reference. In one example, such authentication information may be included in document object, printer object, or job object. In another example,

server application 112 may prompt the user to enter authentication information through a UGI in information apparatus 100 when necessary.

Step 602 indicates whether an output device object is obtained. In the case where an output device object is not obtained, then in step 604, with  
5 one or more output devices 106 selected, the client application 102 may communicate with the selected output device or devices 106 to upload output device objects or related information stored in memory or storage components of the output device or devices 106. It should be noted that a partial or entire  
10 output device object or related information might have been already obtained by the client application 102 during the prior optional discovery process (520 and step 402 in FIG 4). In this case, step 604 may be partially or entirely skipped.

To successfully obtain the output device object or objects from the selected output device or devices 106, several additional optional processes may be involved. As an example, authentication may be necessary when the  
15 selected output device 106 provides service to a restricted group of users. A simple authentication may be implemented by, for example, comparing the identity for the information apparatus 100 with an approved control list of identities or elements stored in the output device 106. Other more complex authentication and encryption schemes may also be used. Information such as  
20 user name, password, ID number, signatures, security keys (physical or digital), biometrics, fingerprints, voice, among others, may be used separately or in combination as authentication means. Such identification and or authentication information may be manually provided by the user or automatically detected by the selected output device or devices 106. With successful authentication, a  
25 user may gain access to all or part of the services provided by an output device 106. The output device object that the client application 102 obtains may vary according to the type or quality of service requested or determined. If authentication fails, it is possible that a user may be refused partially or completely all access to the service. In this case, the user may be provided with  
30 alternatives such as selecting another output device 106 or alternative services.

Another optional process is that a user may be asked to provide payment or deposit or escrow before, during or after output service. Examples of payment or deposit may include cash, credit card, bankcard, charge card,

smart card, electronic cash, among others. The output controller 104 may provide payment calculation or transaction processing as optional feature sets.

It should be noted that a plurality of information apparatuses 100 may request to obtain output device object or objects from the same output device 106 at the same time or at least during overlapping periods. The output device 106 may have components or systems to manage multiple communication links and provide the output device object or objects concurrently or in an alternating manner to multiple information apparatuses 100. Alternatively, an output device 106 may provide components or systems to queue the requests from different information apparatuses 100 and serve them in a sequential fashion according to a scheme such as first come first serve, quality of service, etc. Multi-user communication and service management capability with or without queuing or spooling functions may be implemented by, for example, the output controller 104 as optional feature sets.

Step 606 indicates that the client application 102 may optionally obtain a job object. A job object may include a user's preferences and parameters relating to the output job or process. The client application 102 may obtain a job object by, for example, capturing a user's output preferences through a GUI. In one instance, the client application 102 may provide a universal GUI to a user regardless of what output device 106 is selected. Through such an interface, the user may specify some device-independent parameters such as page range, number of cards per page, number of copies, etc. Alternatively or in combination, the client application 102 may incorporate device-dependent features and preferences into the GUI provided to user. The device dependent portion of the GUI may be supported partially or entirely by some information contained in or provided by the output device object obtained from the selected output device 106. Examples of such device dependent features may include quality of service, service fee, print quality, color or grayscale, duplex or single sided, output page size, among others.

It is possible that some or all components, attributes or fields of a job object have default values. The client application 102 may have certain defaults such as those hard-coded in software or hardware or pre-configured by the user or a manufacturer. In addition, the client application 102 may access a

file to obtain default values or by other means such as communicating with the output device 106, the server application 112 or other applications in the information apparatus 100 or in a network node. The client application 102 may also create or calculate certain default values based on the information it has or  
5 obtained during the output process. These default values may be related, at least in part, to the output device object and or the server application 112 involved in the output process. In some instances, a user may or may not have an opportunity to change or overwrite some or all defaults. The client application 102 may obtain and use some or all defaults with or without user  
10 intervention or knowledge.

In step 608, the client application 102 may create or assemble a composite message. A composite message may be any type of data transferred across network 108 that may include one or more transmissions. A composite message typically includes partially or entirely the objects (with some  
15 default values) obtained by the client application 102 in previous steps.

In step 610, the client application 102 transmits the composite message to server application 112. The client application 102 may communicate with the server application 112 using one or more or a combination of standard network protocols such as WAP, Web Clipping, I-Mode,  
20 TCP/IP, SPX/IPX, PPP, NetBEUI, Apple Talk, among others. Proprietary network protocols or a combination that includes them may also be used. The communication link between information apparatus 100 and application server 112 may be implemented with one or a combination of standard network connections and communication links such as telephone lines, LAN or WAN  
25 links (T1, T3, 56kb, X.25, etc.), broadband connections (ISDN, Frame Relay, ATM etc), wireless connection (radio link, inferred, microwave, etc.) as well as the Internet or corporate Intranets.

In addition to the composite message, the client application 102 and server application 112 may also exchange various types of messages back  
30 and forth to, for example, request service, confirm service availability, configure protocol stack, or confirm or acknowledge receipt of the previous message, among other messages. The server application 112 may also prompt the client application 102 to send or resend some components or objects of the composite

message if such components or objects are incomplete, missing or corrupted. The server application 112, however, may also try to fill in default values (if available) for some or all of the information missing in the composite message. Encode/decode, compression/decompression and/or encryption techniques may  
5 be used to facilitate the transmission of the composite message.

There is a possibility that the application server 112 only provides services to users who have subscribed to such services. In this case, a user may be prompted to log in or sign up when he or she requests service from the server application 112.

10 The server application 112 may receive composite messages or service requests from a plurality of client applications 102 at the same time or at least during overlapping periods. It is therefore, beneficial that the server application 112 runs on a multi-user operating system that enables multiple concurrent users to run applications in separate, protected sessions.

15 It should be recognized that Fig. 6 illustrates only one example of the client application process 406 described with reference to Fig. 4. Other implementations are also possible. As an example, the client application 102 may obtain document objects, output device objects and optional job objects in any combination of order or sequence, or may obtain them concurrently. As  
20 another example, step 610 (transmitting composite message) may proceed before step 608 (creating composite message) is finished. In other words, during the process when client application 102 is obtaining objects from the user, output device 106, or other applications in the same information apparatus 100, the client application 102 may also communicate with the server  
25 application 112 concurrently or in alternating times to transmit partially or completely the objects it has obtained.

Fig. 7 is a flow diagram of an exemplary server application process 701. Typically, an application server 110 is a much more powerful computing device than a mobile information apparatus 100. The server 110  
30 may contain a plurality of applications to interpret, process, or rasterize digital documents into output data. Therefore, in one implementation the core computation of an output process is executed in the application server 110. The server application process 701 may include or utilize:

- A server application 112 that receives a composite message (including an output device object and a document object) from client application 102.
- 5       • A server application 112 that processes the objects received to generate device-dependent output data acceptable to one or more output devices 106 selected by a user. The server application 112 may perform the processing function independently or in combination with other applications.
- 10       • A server application 112 that transmits output data back to the information apparatus 100 requesting output service or services.

In step 700, server application 112 receives a composite message from client application 102. As mentioned earlier, the composite message may include one or more of a document object, an output device object and an optional job object.

- 15       After receiving the composite message from client application 102, the server application 112 may process the document object and convert it into output data. The output data generated is preferred to be in a format or language acceptable or compatible to the output device or devices 106 selected by the user.

- 20       In some cases, the document object or output device object in a composite message may include only references, pointers and or instructions. Such a configuration may, for example, reduce the size of the composite message and therefore make it easier to transmit through a network. In another case, the document object or output device object in a composite message may
- 25       include missing or incomplete information. Digital document (e.g., output content) or output device parameters may not be available or completely available in the document object or the output device object, respectively. In these cases, as shown in step 704, the server application 112 may need to find or fetch partially or entirely the output content or device parameters from
- 30       network nodes or otherwise obtain the content or parameters according to the pointers, references or instructions provided by the objects. For example, an output device object received in a composite message may contain insufficient output device parameters – only the brand name and model number of a



selected output device 106 may be provided. In this case, the server application 112 may either find or fetch the missing output device parameters according to pointers or references provided in the output device object, or the server application 112 may consult a translation service or application in order to obtain the complete output device parameters based on the partial or limited device information that is available. If no further information or data can be found or obtained, predefined defaults may be used to fill in missing information about the output device 106 or alternatively a warning or an error message may be provided to the user for either continuation or cancellation of the process.

Step 704 (obtaining output content and or device parameters) may be entirely or partially skipped if the output content and output device parameters are already included in the document object and output device object, respectively.

In order to process a digital document into device dependent output data, step 706 shows that the server application 112 may need to involve one or more helper applications. A helper application is any application in the server 110 or other network node that participates, helps or assists in the output process of the present invention. Examples of helper applications may include, software components, software applications, device drivers, printer drivers, etc. The helper application or applications may perform one or more of the following tasks among others:

- Open, parse, or interpret a particular digital document format or language.
- Convert a digital document into an intermediate format, language or data.
- Process an input digital document into a raster format including, as an example, one or more raster image processing operations such as rasterization, scaling, color correction, color matching, segmentation, halftoning, compression, decompression etc.
- Convert or encode rasterized data into a device specific output data.

The helper applications may participate in the output process in various ways. As an example, a server application 112 may involve one or more helper applications to decode, parse, interpret, and or process a digital

document into an intermediate file, format, language or data. And then the server application 112 may involve one or more helper applications to further convert the intermediate result into output data. In another example, the server application 112 may involve two or more groups of helper applications. The first  
5 group of helper applications may decode, interpret, and process a digital document into intermediate file, format, language or data. The second group of helper applications may convert the intermediate results into output data. A group may consist of one or more applications.

The server application 112 may identify, locate, invoke, launch,  
10 and or integrate the appropriate helper applications or its components based on the information (e.g., output device parameters) provided in an output device object. A translation service (e.g., database application, directory service) may provide information to the server application 112 as to where to find, obtain, or use the helper applications. The helper applications may reside locally in the  
15 application server 110 or remotely in another network node. If a helper application is located in another network node, the server application 112 may acquire or download the helper application to the application server 110. Alternatively, the server application 112, considering application availability or load balancing, may direct the digital document to be processed in another  
20 server node where the helper application or applications are run.

In some cases, however, the server application 112 may have the ability to process and generate the correct output data without involving additional helper applications and step 706 may be skipped. As an example, the server application 112 may already contain software components and  
25 feature sets capable of supporting and generating, different print data or output data formats or language such as PostScript or PCL or XML etc. Therefore, if the output device object indicates that the output device 106 is a PostScript printer or any other that it supports, the server application 112 may not need to invoke, or download or incorporate a helper application or a helper application  
30 component such as a PostScript driver. The server application 112 may just proceed and convert the digital document into a PostScript file as print data. PostScript is used here as an example, other formats, languages, data used for other types of print data or output data follows the same fashion.

When fetching output content or device parameters or software components or drivers from other network nodes, the server application 112 may need authentication information in order to gain access. Such authentication information may be already stored in the server application 112 (e.g., in a user profile), in the received objects (e.g., job object, output device object or document object), or the user may input authentication information as needed.

While processing digital content in step 708, the server application 112 may also distribute or send a presentation or GUI to a client device (e.g., information apparatus 100) to inform the user of the processing status (shown in step 709). The presentation or GUI in the client device may also capture user's preferences and inputs such as login information, security information among other preferences or inputs. This client/server implementation described here may provide an efficient computing environment. For example, logic for the server application 112 may run in the application server 110 and its distributed user interface may run in the client device (e.g., information apparatus 100). Therefore, only data relating to keystrokes, mouse clicks and screen updates may, as an example, travels through the network. This client/server implementation may reduce bandwidth requirements. Such a GUI may be implemented by, for example, instructing the client application 102 to launch on the display screen of the client information apparatus 100 a plurality of windows emulating the user interface of the server application 112. The presentation of the server application interface may be displayed efficiently through these windows in the client application 102.

If the server application 112 receives no job object or an incomplete job object in a composite message, the server application 112 may assume default values for the job object or optionally, as shown in step 709, it may also launch a GUI in the information apparatus 100 as described above to obtain partially or entirely the job object fields (job preference) from the user. Information provided in the job object may be used in the process of generating output data (step 708).

It is noted that the output data (or print data in the case of a printer) generated by the server application 112 may or may not be the final

output data or the final print data that can feed directly into an output engine or a printer engine 1008. The output data sent to output device 106 through information apparatus 100 may in some cases need further processing by an application in the information apparatus 100 or by the output controller 104 or  
5 printer controller 1010 or combination before finally being sent to output engine or printer engine 1008. All these different combinations of processes and tasks or load distributions are possible implementations that shall fall within the scope and spirit of the present invention.

In step 710, the server application 112 transmits output data to the  
10 information apparatus 100 through network 108. Encryption techniques may be applied to the output data to ensure security. Compression/ decompression, encode/decode may also be implemented to facilitate the transmission of output data over network 108.

Fig. 8 is a flow diagram of an exemplary final output process 801  
15 for pervasive output, which may include or utilize:

- A server application 112 transmits output data to information apparatus 100.
- An information apparatus 100 transmits output data, with or without further processing, to the output device 106 selected by the user.
- 20 • An output device 106 generates final output based on the input output data with or without further processing.

After receiving output data from server application 112, the information apparatus 100 may then transmit the output data to the output device 106 selected by the user in step 806. In some cases, the client  
25 application 102 may further process the output data (as shown in step 804). This further processing in the information apparatus 100 may include one or more operations such as encoding, decoding, compression, decompression, rasterization, scaling, color correction, halftoning, watermarking, adding templates, name, time stamps, etc., as shown in step 804, before sending the  
30 output data to the output device 106 through communication link 116 in step 806. The client application 102 may involve other applications 103 for part or all of the processing in step 804.

During the time when server application 112 processes a composite message, the communication link 116 between information apparatus 100 and output device 106 selected by the user may be constantly maintained or it may be temporarily dropped and then resumed for transmitting  
5 output data. Encryption techniques may be applied to the output data to ensure security. Compression/decompression, encode/decode may also be implemented to facilitate the transmission of output data over communication link 116.

After receiving output data from information apparatus 100, an  
10 output device 106 may simply buffer the output data, as shown in step 810, before sending the data to output engine (or printer engine in the case of a printer) 1008 for final output. In cases where an output device 106 includes a printer controller 1010, output controller 104 or combined controller, such controller may, jointly or individually, further process the output data (shown in  
15 step 814) before sending the data to output engine or printer engine 1008 for final output.

It is possible that a plurality of information apparatuses 100 may transmit output data to an output device 106 at the same time or at least during overlapping periods. It may then become necessary to implement queuing or  
20 spooling functionality in the output device 106. Preferably, the output device 106 stores output data it receives in a queue until the output data can be processed. Such queuing and spooling capability may be implemented partially or entirely by the output controller 104 as an optional feature set. A user may be notified when the output device 106 is ready to process a particular output  
25 job or the status of the output job in the queue. Once the output device 106 completes the output service, the user may terminate the output process by indicating such an intention through an interface on information apparatus 100 or by moving the information apparatus 100 out of the communication range of the output device 106.

30 Figs. 9A -9F show a series of graphical user interfaces (GUIs) rendered at different times on a display screen 901 of an information apparatus 100 to illustrate one implementation of the output process 401 described with reference to Fig. 4. The illustrated example of user interface can be

implemented in an information apparatus 100 with or without an operating system. The user interface is illustrated here only as an example, other user interfaces may also be implemented and in no way restrict the scope and claims of the present invention.

5 Referring to Fig. 9A, screen 901 may be a part of an information apparatus 100 such as, without limitation, palmtop, PDA, mobile phone, pager, Internet appliance, web pads, e-book etc. In this particular example, as shown in screen 901, a user is reading a news article published on the Internet using a document browsing application in information apparatus 100. Part of the article  
10 (e.g., photo 900) cannot be fully displayed and so is indicated by a link or tag. The inability to fully display photo 900 may arise from a variety of reasons including limitations in display capacity, memory, processing power, or lack of support by a service provider, application, communication protocols, or software protocols, among other reasons.

15 As shown in FIG 9A, a document browsing application in the information apparatus 100 may have a plurality of functions and feature sets available to the user through the GUI. A printing function control 902 may be one of these features. The output or printing functionality may be provided by accessing a client application 102 with or without an operating system. In this  
20 illustrated example, the user may invoke the output function by selecting the print function control or icon 902. The user can make the selection by using, for example, any of a keyboard, keypad, mouse, stylus, soft keys, push buttons, software command, touch sensitive screen, voice-activated command, among others. Other display methods or functionalities or feature sets such as a drop  
25 down list, a pull down menu, among others, are also possible.

When the user selects Print function control 902, the client application 102 may be invoked or launched. The output process 401 described with reference to Fig. 4 may then proceed. The client application 102 may obtain a document object (e.g., the news article and or the pointer of the new  
30 article) from the document browsing application. As described earlier, the user may be able to choose to output the reduced digital document (e.g., without photo 900) as displayed in the information apparatus 100 or to output the full digital document in its original form (e.g., with photo 900). We assume for this

example that the user has preset the default to always output the full digital document in its original form.

Since the user does not have a pre-selected or default output device 106, a discovery process 520 may automatically proceed in this example. A communication manager may coordinate the discovery process 520. As described earlier, the communication manager may be part of the client application 102 or may be a separate application that can communicate with the client application 102.

Assuming in this example that he or she did not specify any searching criteria for the discovery process 520, the user may be presented with all the printers 106, if any, that are available to take the print job. In the case where no available printers are found (not shown here), the user may also be notified and provided with alternatives as described earlier in the discovery process 520.

Assume in this example that three printers 106 are found. Their identities and service charges are listed on the GUI illustrated in Fig. 9B. The user may select a "more information" control or icon 904 to get more detailed information on each available output device 106. The user may select a printer 106 from the list, for example, by moving a cursor to highlight the name of the selected printer 106 and then selecting a "select" control or icon 906. The user may also withdraw the service request from any of the three printers by selecting a "cancel" control or icon 907.

Assume in this example that the user has selected the PH inkjet 260 printer. The next GUI, as illustrated in Fig. 9C, provides the user with a confirmation. Information included in the confirmation may include (1) address (pointers) of the digital document intended for output, (2) printer selected, (3) service fee that will be charged. Various payment types and methods may be used. The user may also choose to provide payment, deposit or escrow in various forms. However, for simplicity of illustration, only two are shown in this particular example. If payment by credit card is selected, the user may be prompted to provide credit card information. In one example, the user may then provide such information through a GUI (not shown) on the information apparatus 100, which then transmits the information to the selected output

device 106. In another example, the user may provide credit card information directly to the selected output device 106 through an interface provide by the output device106. If the user has selected the cash payment option, cash may be physically deposited into a cash collector installed or connected to the  
5 selected output device 106. Or the user may transfer cash in electronic form from the information apparatus 100 to the output device 106. The user may or may not need to manually input payment information such as a credit card number. A user profile and or a variety of payment information may have already been saved in the user's information apparatus 100. The client  
10 application 102 may automatically fetch necessary payment information and process the transaction with the output device 106 or with a remote transaction server. If the output service is free, no payment information will need to be collected. If the output service is a subscription, then membership, login, authorization, or security information may be collected instead or in addition.

15 After the user confirms all the information and provides payment or deposit as requested, the user may be prompted to describe the job object as illustrated in Fig. 9D. Some of the selections for the job object input illustrated here may be device-dependent while others may be device-independent. The user can make selections by using, for example, radio buttons among other  
20 controls. Some default values, such as items 908 and 909, may have been preset by the user or automatically calculated by the client application 102 after negotiation with the output device 106. The user may also change all or some default values. After describing the job object, the user may select the "Next" control or icon 910 to move to the next step. It should be noted that only some  
25 exemplary or commonly used selections are displayed in the exemplary GUI of Fig. 9D. The user may make further selections by, for example, selecting the "more option" control or icon 911 or by simply scrolling down the display.

After the user submits the job object, the client application 102 sends a composite message 430 to an application server 110. The composite  
30 message 430 may include a document object, a printer object, and a job object. The application server 110 may contain server application 112. In this example, the server application 112 may need to fetch the output content (in its original format) based on the pointers provided in the document object. The server



application 112 may obtain or invoke helper applications to process the output content (e.g., the news article) into print data that can be accepted by the printer 106 selected by the user (e.g., PH Inkjet 260). The server application 112 and or the helper application may perform one or more raster image processing  
5 operations on the output content. During this server application process 701, the sever application 112 may optionally launch a GUI in a window 912 as shown in Fig. 9E to provide the user with estimated processing time and or status. The user may choose to hide this window by selecting the "hide" control or icon 914. The user may also choose to abort the process by selecting the  
10 "cancel" control or icon 913.

After it has finished processing the output content and has generated the necessary print data, the server application 112 transmits the print data to the selected output device 106 through the user's information apparatus 100. Transmission may be wired or wireless. The client application  
15 102 in the information apparatus 100 may or may not further process the print data before passing it to the output device 106. The output device 106, after receiving the print data, may queue the print job in its memory or storage component until it is ready to process this particular print job. As shown in Fig. 9F, the user may be notified when the original document is being printed or has  
20 been printed out. The user may also be notified of the service fee that has been, for example, charged to a credit card or deducted from a cash deposit. The user may be provided with a "more option" control or icon 916. For example, the user may choose this printer as a preferred default printer so that for the next output or print operation a discovery process 520 may be skipped or  
25 shortened if this printer 106 is found to be available.

Figs. 9A-9F provides only one example of output process 401 described with reference to Fig. 4. While the above descriptions contain many specificities, these should not be construed as limitations on the scope of the invention, but rather as exemplary embodiment thereof. Other user interfaces  
30 and embodiments may also be implemented. The process may also be implemented with more or fewer steps. As an example, security verification and authentication may be added to the steps illustrated in Figs. 9A-9F. As another example, the step illustrated by Fig. 9B may be skipped as the user may have

pre-selected or preferred a default printer. These and other possible variations do not however depart from the scope and spirit of present invention.

Having described and illustrated the principles of our invention with reference to an illustrated embodiment, it will be recognized that the

5 illustrated embodiment can be modified in arrangement and detail without departing from such principles. In view of the many possible embodiments to which the principles of our invention may be applied, it should be recognized that the detailed embodiments are illustrative only and should not be taken as

10 limiting the scope of our invention. Rather, I claim as my invention all such embodiments as may come within the scope and spirit of the following claims and equivalents thereto.

We Claim:

1. A data output method for rendering at an output device output content managed from an information apparatus, comprising:
  - obtaining a document object relating to the output content managed from  
5 the information apparatus;
  - obtaining an output device object with one or more attributes corresponding to the output device;
  - providing the document object and the output device object to a server application operated on a server that is distinct from the information apparatus  
10 and the output device, and generating with the server application output data employing at least partly the document object and the output device object; and
  - providing the output data to the output device for rendering the output content.
2. The method of claim 1 in which the output data includes device  
15 dependent data with respect to the output device.
3. The method of claim 1 in which the providing of the output data to the output device includes transmitting the output data through a network.
4. The method of claim 1 in which the providing of the output data to the output device further comprises receiving the output data at the information  
20 apparatus and delivering the output data to the output device.
5. The method of claim 4 further comprising processing the output data before delivering the output data to the output device.
6. The method of claim 1 in which the output data comprises one or more of a page description language, a markup language, a file format, an image  
25 format, a graphics format, an audio file, and a video file.
7. The method of claim 1 in which the generating of the output data comprises at least a partial raster image processing operation on the output content.
8. The method of claim 7 in which the image processing operation  
30 includes one or more of an interpretation operation, a conversion operation, a rasterization operation, a scaling operation, a segmentation operation, color space transform operation, an image enhancement operation, a color correction operation, a half-toning operation, a compression operation, and an encryption

operation.

9. The method of claim 1 further comprising establishing a communication channel between the information apparatus and the output device and receiving one or more attributes characterizing the output device via  
5 the communication channel.

10. The method of claim 1 further comprising discovering the selected output device as one of one or more output devices that are discovered by the information apparatus as being available for rendering the output content.

11. The method of claim 10 in which the information apparatus discovers  
10 the one or more output devices with wireless communication.

12. The method of claim 10 in which the discovering of the one or more output devices includes the information apparatus sending an output service request and awaiting a response from one or more output devices.

13. The method of claim 10 in which the discovering of the one or more  
15 output devices includes one or more output devices posting their availability and the information apparatus contacting one or more of the one or more output devices.

14. The method of claim 10 in which the discovering of one or more output devices includes the information apparatus obtaining from a service node  
20 information about one or more output devices and the information apparatus contacting one or more of the one or more output devices.

15. The method of claim 10 in which the discovering of the one or more output devices involves determining if the one or more output devices satisfy one or more output service requirements.

25 16. The method of claim 15 in which the one or more output service requirements include one or more of price, quality of service, availability, and default output device.

17. The method of claim 10 further comprising obtaining at least partial output device objects from the one or more output devices that are discovered.

30 18. The method of claim 17 further comprising rendering in the information apparatus information based upon the at least partial output device objects for the one or more output devices that are discovered and obtaining from a user a selection of the selected output device.

19. The method of claim 10 further comprising selecting one of the one or more output devices that are discovered.

20. The method of claim 19 in which the selecting is related at least partly on one or more of a price indicator, a quality of service indicator, an availability indicator, a preset preference indicator, a first available indicator and a default output device indicator.

21. The method of claim 19 in which the selecting is related at least partly on a user input.

22. The method of claim 19 in which the selecting includes automatic selection.

23. The method of claim 1 further comprising obtaining at the information apparatus a job object with one or more attributes characterizing the rendering of the output content.

24. The method of claim 23 in which the job object includes an output preferences attribute characterizing one or more output preferences including one or more of output quality, layout, number of output copies, number of windows per page, color or grayscale, and output size.

25. The method of claim 23 in which the job object includes an identification attribute characterizing one or more identification features including one or more of a security setting, authentication, security information, payment information, subscription information, and user identification.

26. The method of claim 23 in which the job object includes a job attribute characterizing one or more job features including one or more of a job priority or quality of service feature, job status information indicating status of the output job, a job instruction feature indicating one or more of job queuing, cancellation, execution, and output priority.

27. The method of claim 23 in which the one or more job object attributes are obtained at least partly based on information received from the output device.

28. The method of claim 23 in which the one or more job object attributes are obtained at least partly from a user input.

29. The method of claim 23 in which the one or more job object attributes are obtained at least partly from a preset user preference or a default.

30. The method of claim 1 in which the document object includes the output content.

31. The method of claim 1 in which the document object includes a pointer or reference to the output content.

5        32. The method of claim 1 in which the output content is stored on a device other than the information apparatus.

33. The method of claim 1 in which the document object includes one or more document instruction attributes that include instructions for one or more of viewing, obtaining, opening, interpreting, encoding, decoding, converting,  
10        compressing, decompressing, rasterizing, authenticating, encrypting, decrypting, or manipulating the output content.

34. The method of claim 1 in which the document object includes software code.

35. The method of claim 1 in which the document object includes a  
15        reference or pointer to another object.

36. The method of claim 1 in which the output device object includes an output device identification attribute that includes one or more of an output device brand indication, a model indication, an identification number indication, an output device type indication, and a network address indication.

20        37. The method of claim 1 in which the output device object includes an output device services attribute that includes one or more of a color or grayscale output indication, a laser or inkjet output indication, a duplex indication, an output quality indication, and a price per page indication.

38. The method of claim 1 in which the output device object includes an  
25        output device language attribute that indicates one or more output data languages supported by the output device.

39. The method of claim 1 in which the output device object includes an output data format attribute that indicates one or more output data format supported by the output device.

30        40. The method of claim 1 in which the output device object includes a payment information attribute that indicates payment information on one or more output services provided by the output device.

41. The method of claim 1 in which the output device object includes a

security attribute that indicates one or more security or authentication requirements supported by the output device.

42. The method of claim 1 in which the output device includes one of a printing device, a display device, a projection device, and an audio output device.

43. The method of claim 1 in which the information apparatus includes a portable device.

44. A data output method for rendering at an output device output content managed from an information apparatus, comprising:  
delivering a document object and an output device object to a server application operated on a server that is distinct from the information apparatus and the output device, the document object related to the output content managed from the information apparatus and the output device object having one or more attributes corresponding to the output device;  
generating with the server application output data employing at least partly the document object and the output device object; and  
delivering the output data to the output device for rendering the output content.

45. The method of claim 44 further comprising discovering the selected output device as one of one or more output devices that are discovered by the information apparatus as being available for rendering the output content.

46. The method of claim 44 further comprising obtaining at the information apparatus a job object with one or more attributes characterizing the rendering of the output content.

47. The method of claim 44 in which the document object includes the output content.

48. The method of claim 44 in which the document object includes a pointer or reference to the output content.

49. The method of claim 44 in which the output device object includes an output device identification attribute that includes one or more of an output device brand indication, a model indication, and a network address indication.

50. The method of claim 44 in which the information apparatus includes a portable computing device.

51. The method of claim 44 in which the output device includes a printing device.

52. In computer readable media, data output software for rendering at an output device output content managed from an information apparatus,

5 comprising:

software for delivering a document object and an output device object to a server application operated on a server that is distinct from the information apparatus and the output device, the document object related to the output content managed from the information apparatus and the output device object

10 having one or more attributes corresponding to the output device;

software for generating with the server application output data employing at least partly the document object and the output device object; and

software for delivering the output data to the output device for rendering the output content.

15 53. The media of claim 52 in which the output device includes a computer printer.

54. The media of claim 52 further comprising software for discovering the selected output device as one of one or more output devices that are discovered by the information apparatus as being available for rendering the  
20 output content.

55. The media of claim 52 further comprising software for obtaining at the information apparatus a job object with one or more attributes characterizing the rendering of the output content.

25 56. The media of claim 52 in which the document object includes the output content.

57. The media of claim 52 in which the output device object includes an output device identification attribute that includes one or more of an output device brand indication, a model indication, and a network address indication.

30 58. The media of claim 52 in which the information apparatus includes a portable computing device.

59. In computer readable media, data output software for rendering at an output device output content managed from an information apparatus, comprising:



software for obtaining an output device object with one or more attributes corresponding to the output device;

software for providing the document object and the output device object to a server application operated on a server that is distinct from the information apparatus and the output device, and generating with the server application  
5 output data employing at least partly the document object and the output device object; and

software for providing the output data to the output device for rendering the output content.

10 60. The media of claim 59 in which the output device includes a computer printer.

61. The media of claim 59 further comprising software for discovering the selected output device as one of one or more output devices that are discovered by the information apparatus as being available for rendering the  
15 output content.

62. The media of claim 59 further comprising software for obtaining at the information apparatus a job object with one or more attributes characterizing the rendering of the output content.

63. The media of claim 59 in which the document object includes the  
20 output content.

64. The media of claim 59 in which the output device object includes an output device identification attribute that includes one or more of an output device brand indication, a model indication, and a network address indication.

65. The media of claim 59 in which the information apparatus includes a  
25 portable computing device.

66. A data output system for rendering at an output device output content managed from an information apparatus, comprising:

means for obtaining a document object relating to the output content managed from the information apparatus;

30 means for obtaining an output device object with one or more attributes corresponding to the output device;

means for providing the document object and the output device object to a server application operated on a server that is distinct from the information

apparatus and the output device, and generating with the server application output data employing at least partly the document object and the output device object; and

5 means for providing the output data to the output device for rendering the output content.

67. The system of claim 66 in which the output device includes:

an output engine that can output the output content to an output medium in accordance with a device-dependent output data acceptable to the output engine;

10 a connection to an output controller having:

means for providing at least part of the output device object to the information apparatus, and

means for receiving an output data from the information apparatus, and

15 means for passing the output data to the selected output device for rendering of the output content.

68. The method of claim 67 in which the output medium includes one or more of a substrate, a paper, a display screen, and a projection.

69. The system of claim 67 in which the output controller further comprising means for storing one or more output device objects with one or  
20 more attributes corresponding to the one or more output devices.

70. The system of claim 67 further comprising means for receiving plural service requests from plural information apparatuses, the output controller providing the at least part of the output device object to each of the plural information apparatuses.

25 71. The system of claim 67 further comprising means for receiving from the information apparatus device-specific output data corresponding to the output content to be rendered at the selected output device.

72. The system of claim 67 in which the output controller further includes means for providing the at least part of the output device object to the  
30 information apparatus as unsolicited information without a request therefor from the information apparatus.

73. The system of claim 67 in which the at least part of the output device object is provided to the information apparatus in more than one communication

session with the information apparatus.

74. The system of claim 67 in which the output device includes a printer.

75. The system of claim 74 in which the printer includes a printer controller, the output controller further includes means to converting the output  
5 data into a form compatible with the printer controller.

76. The system of claim 74 in which the printer does not includes a printer controller; the output controller further includes means to converting the output data into a form compatible with the printer engine

77. The system of claim 67 in which the output controller further includes  
10 means for implementing payment processing as compensation for rendering of the output content on the output device.

78. The system of claim 67 in which the output controller further includes means for implementing job management functionalities with one or more of data output job queuing and spooling.

79. The system of claim 67 in which the output controller further includes  
15 means for providing a user interface for receiving user-implemented modifications of the controller.

80. The system of claim 67 in which the output controller further includes means for implementing a security procedure that limits access to the rendering  
20 provided by the selected output device.

81. The system of claim 80 in which the security procedure includes storing in a memory component an access control list specifying an information apparatus for which the selected output device will render output content.

82. The system of claim 80 in which the security procedure includes one  
25 or more of a subscription indicator, a login, a password, and an authentication.

83. The system of claim 67 in which the output controller is included in the output device.

84. The system of claim 67 in which the output controller is separate from the output device.

85. The method of claim 67 in which the output data received by the  
30 output controller includes a device dependent data acceptable to the output engine.

86. The system of claim 67 in which the output controller further includes

means for converting the output data content into a form compatible with the output engine.

87. The system of claim 67 in which the output controller further includes means for performing at least partially, raster image processing operations on  
5 the output data.

88. A data output service method for rendering at an output device output content managed from an information apparatus, comprising:  
obtaining by wireless communication from the information apparatus at least part of a document object relating to the output content;  
10 obtaining at least part of an output device object with one or more attributes relating to the output device;  
providing the document object and the output device object to a server application operated on a server that is distinct from the information apparatus and the output device, and generating with the server application output data  
15 relating to the output device; and  
providing the output data to the output device for rendering the output content as the data output service.

89. The method of claim 88 further comprising obtaining payment information from the information apparatus corresponding to payment for the  
20 data output service provided at the output device.

90. The method of claim 88 in which the providing of the output data includes transmitting the output data to the information apparatus and delivering at the information apparatus the output data to the output device.

91. The method of claim 89 in which the payment information is provided  
25 automatically by the information apparatus.

92. The method of claim 89 in which the payment information is provided through the information apparatus as entered by a user in response to a prompt to enter payment information.

93. The method of claim 89 in which the payment information includes  
30 data output service subscriber information corresponding to a pre-arranged subscription to the data output service.

94. The method of claim 93 further comprising correlating the data output service subscriber information with a subscriber database that stores

subscriber profiles with subscription payment information.

95. The method of claim 88 further comprising obtaining authentication information from the information apparatus to authenticating permission for the information apparatus to access the data output service.

5        96. The method of claim 88 in which the information apparatus includes a portable computing device.

97. The method of claim 88 in which the output device includes a printer.

98. A data output service system for rendering at an output device output content managed from an information apparatus, comprising:

10       means for delivering a document object and an output device object to a server application operated on a server that is distinct from the information apparatus and the output device, the document object relating to the output content and the output device object having one or more attributes corresponding to the output device;

15       means for generating with the server application output data related to the output device for rendering the output content; and

      means for delivering the output data to the output device for rendering the output content.

20       99. The system of claim 98 further comprising means for obtaining payment information from the information apparatus corresponding to payment for the data output service provided at the output device.

      100. The system of claim 98 in which the means for delivering the document object and the output device object to the server application and the means for delivering the output data to the output device are included in an  
25       output controller associated with the output device.

      101. The system of claim 100 in which the output controller is included in the selected output device.

      102. The system of claim 100 in which the output device includes a display output control unit and the output controller is included in the display  
30       output control unit of the output device.

      103. The system of claim 98 in which the output device is a printer.

      104. The system of claim 98 in which the information apparatus includes a portable computing device.

105. The system of claim 99 in which the payment information is provided automatically by the information apparatus.

106. The system of claim 99 in which the payment information is provided through the information apparatus as entered by a user in response to  
5 a prompt to enter payment information.

107. The system of claim 99 in which the payment information includes data output service subscriber information corresponding to a pre-arranged subscription to the data output service.

108. The system of claim 107 further comprising correlating the data  
10 output service subscriber information with a subscriber database that stores subscriber profiles with subscription payment information.

109. The system of claim 98 further comprising obtaining authentication information from the information apparatus to authenticating permission for the information apparatus to access the data output service.

110. A method for receiving data output service for rendering at an  
15 output device output content managed from an information apparatus, comprising:

establishing a communication channel between the information apparatus and a selected output device;

20 providing at the information apparatus at least part of a document object and at least an indication of the selected output device to a server that is distinct from the information apparatus and the output device, the document object relating to the output content;

receiving at the information apparatus an output data associated with the  
25 rendering of the output content at the selected output device; and

sending the output data to the output device for rendering the output content as the data output service.

111. The method of claim 110 further comprising sending payment information from the information apparatus corresponding to payment for the  
30 data output service provided at the output device.

112. The method of claim 111 in which the payment information is provided automatically by the information apparatus.

113. The method of claim 111 in which the payment information is

provided through the information apparatus as entered by a user in response to a prompt to enter payment information.

114. The method of claim 111 in which the payment information includes data output service subscriber information corresponding to a pre-arranged  
5 subscription to the data output service.

115. The method of claim 114 further comprising correlating the data output service subscriber information with a subscriber database that stores subscriber profiles with subscription payment information.

116. The method of claim 110 further comprising sending authentication  
10 information from the information apparatus to authenticating permission for the information apparatus to access the data output service.

117. The method of claim 110 in which the information apparatus includes a portable computing device.

118. The method of claim 110 in which the output device includes a  
15 computer printer.

119. A method for generating a device dependent output data acceptable for rendering at a selected output device, the device dependent output data corresponding to output content accessible at least partly by an information apparatus, the method comprising:  
20 delivering at least part of a document object and at least part of an output device object to a device that is distinct from the information apparatus and the output device, the document object being associated with the output content and the output device object having one or more attributes corresponding to the selected output device; and  
25 generating at the device the output data acceptable to the selected output device.

120. The method of claim 119 further comprising establishing a communication channel between the information apparatus and the selected output device; and

30 receiving at the information apparatus over the communication channel one or more attributes corresponding to the selected output device.

121. The method of claim 119 in which the device that is distinct from the information apparatus and the selected output device includes one of a server,

a computing device in a network, or another computing device.

122. The method of claim 119 in which the generating of the output data includes at least partially one or more of a conversion operation and a raster image processing operation.

5        123. The method of claim 119 further comprising discovering the selected output device as one of one or more output devices that are discovered by the information apparatus as being available for rendering the output content.

10        124. The method of claim 119 in which the document object includes the output content.

125. The method of claim 119 in which the document object includes a pointer or reference to the output content.

15        126. The method of claim 119 in which an application in the device, distinct from the information apparatus and the selected output device, obtains the output content based on a pointer or reference to the output content included in the document object.

127. The method of claim 119 further comprising delivering the output data to the selected output device for rendering of the output content.

20        128. A method for generating device dependent output data acceptable for rendering at each of one or more selected output devices, the device dependent output data for each selected output device corresponding to an output content accessible at least partly by an information apparatus, the method comprising:

25        delivering at least partially a document object and one or more output device objects to one or more devices that are distinct from the information apparatus and the one or more selected output devices, the document object being associated with the output content, and the one or more output device objects having one or more attributes corresponding to each of the one or more selected output devices; and

30        generating at the one or more devices the device dependent output data associated with each of the corresponding one or more selected output device.

129. The method of claim 128 further comprising establishing a communication channel between the information apparatus and one or more



output devices.

130. The method of claim 129 further comprising:

receiving at the information apparatus over the communication channel one or more attributes corresponding to the one or more output devices; and

5 selecting at the information apparatus one or more output devices for rendering the output content based at least in part on the one or more attributes.

131. The method of claim 128 in which each of the one or more devices distinct from the information apparatus and the one or more selected output devices include one of a server, a computing device in a network, and another  
10 computing device.

132. The method of claim 128 in which the generating of the output data for each selected output device includes one of invoking, launching, calling, utilizing, and involving one or more applications.

133. The method of claim 128 in which the generating of the output data  
15 for each selected output device includes at least partially one or more of a conversion operation and an raster image processing operation.

134. The method of claim 128 further comprising discovering the selected output device as one of one or more output devices that are discovered by the information apparatus as being available for rendering the  
20 output content.

135. The method of claim 128 in which the document object includes the output content.

136. The method of claim 128 in which the document object includes a pointer or reference to the output content.

25 137. The method of claim 136 in which the one or more devices obtain the document object based on the pointer or reference to the output content included in the document object.

138. The method of claim 128 further comprising delivering the device dependent output data to each selected output device for rendering of the  
30 output content.

139. A data output method for rendering at a selected output device output content from an information apparatus, comprising:

establishing a communication channel between the information

apparatus and the selected output device;

receiving at the information apparatus output data from a device that is distinct from the information apparatus and the selected output device; the output data being related to the output content and associated with the selected

5 output device; and

delivering the device specific output data from the information apparatus to the selected output device for rendering of the output content.

140. The method of claim 139 further comprising obtaining an output device object and a document object at the information apparatus, the  
10 document object being associated with the output content, and the output device object having one or more attributes corresponding to the selected output device; and

sending the document object and the output device object to the device distinct from the information apparatus and the selected output device for  
15 generating the output data.

141. The method of claim 140 in which the obtaining of the output device object includes obtaining information from a user input, from a communication with the selected output device, and from a default parameter or preference.

142. The method of claim 139 further comprising discovering the  
20 selected output device as one of one or more output devices that are discovered by the information apparatus as being available for rendering the output content.

143. The method of claim 139 further comprising selecting an output device compatible for receiving the output data.

25 144. The method of claim 139 in which the received output data is device dependent with respect to the selected output device.

145. The method of claim 139 further comprising conforming at the information apparatus the output data into a form more suitable for rendering at the selected output device.

30 146. A data output method for rendering at an output device output content from an information apparatus, comprising:

receiving at the information apparatus output data from a device that is distinct from the information apparatus and the selected output device, the

output data related to the output content and associated with an output device;  
selecting an output device compatible for receiving the output data for  
rendering the output content;

- 5        establishing a communication channel between the information  
apparatus and the selected output device; and  
delivering the output data to the selected output device for outputting the  
output content.

147. The method of claim 146 further comprising discovering the  
selected output device as one of one or more output devices that are  
10    discovered by the information apparatus as being available for rendering the  
output content.

148. The method of claim 146 in which the received output data is  
device dependent with respect to the selected output device.

149. The method of claim 146 in which the device is distinct from the  
15    information apparatus and the selected output device includes one of a server,  
a computing device in a network, and another computing device.


150. The method of claim 146 further comprising conforming at the  
information apparatus the output data into a form more suitable for rendering at  
the selected output device.

20        151. The method of claim 146 further comprising obtaining an output  
device object and a document object at the information apparatus, the  
document object being associated with the output content and the output device  
object having one or more attributes corresponding to the selected output  
device; and

25        sending the document object and output device object to the device  
distinct from the information apparatus and the selected output device for  
generating the output data.

152. The method of claim 151 in which the obtaining of the output device  
object include obtaining one or more information from a user input, from a  
30    communication with the selected output device, and from a default parameter or  
preference.

Fig. 1

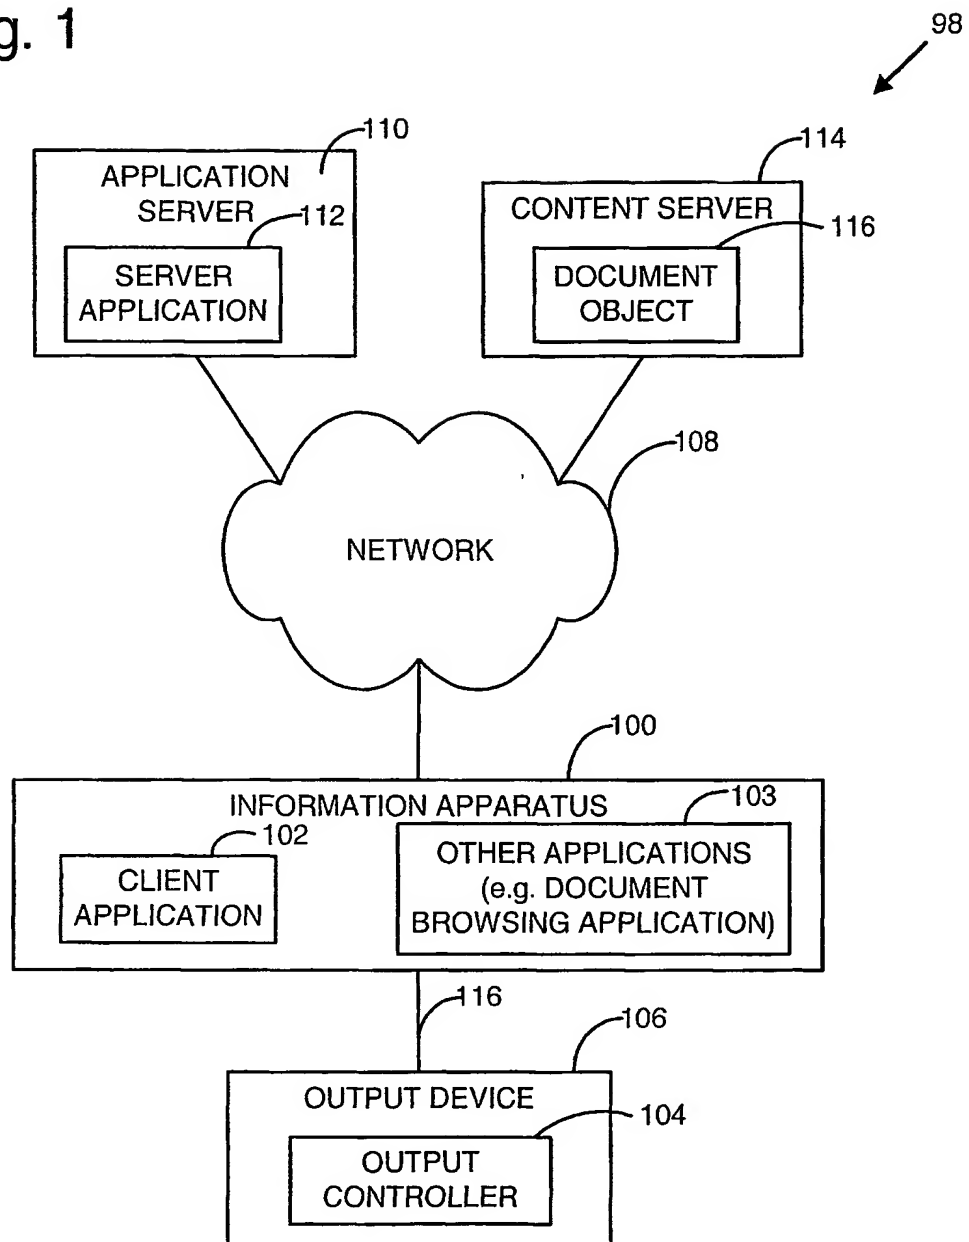

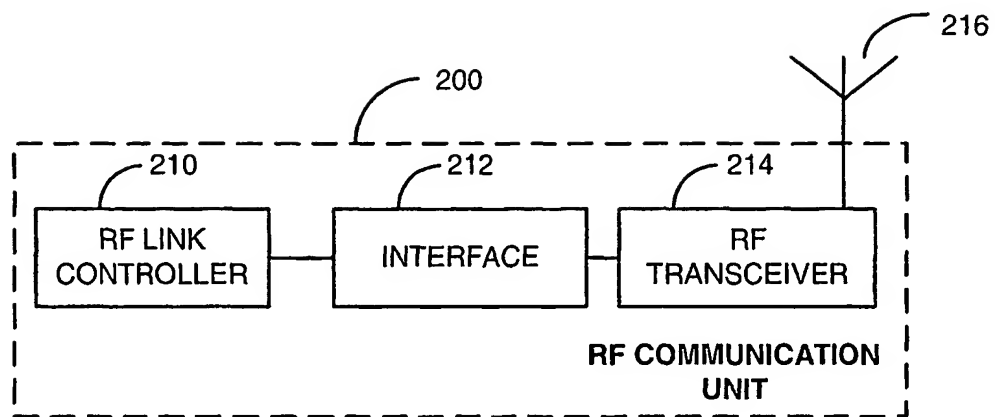


Fig. 2A

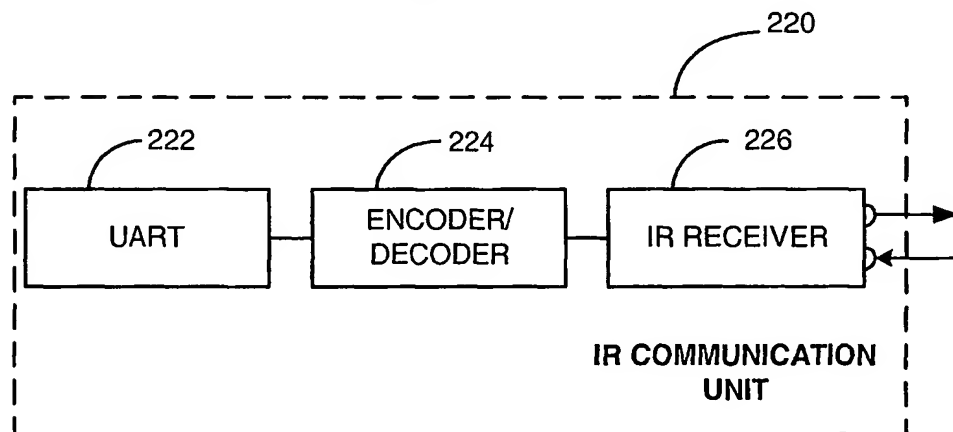


Fig. 2B

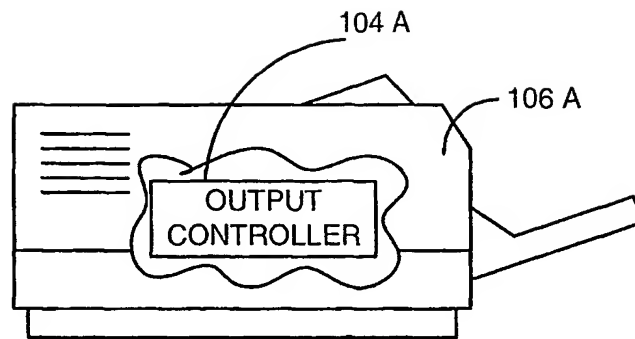


Fig. 3A

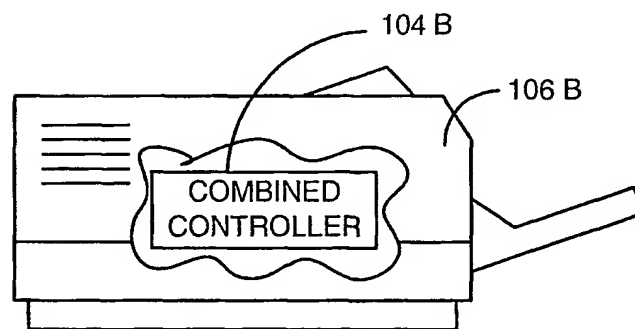


Fig. 3B

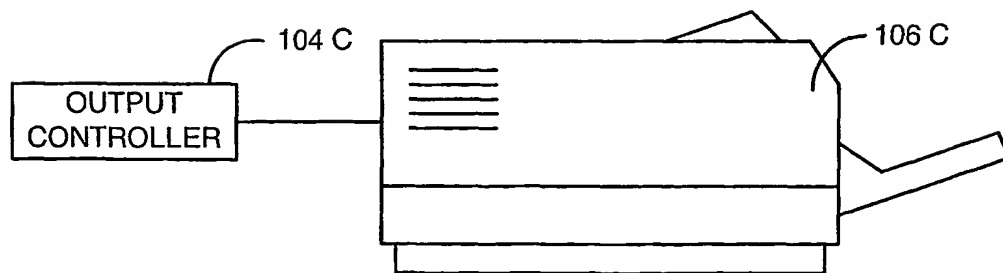


Fig. 3C

Fig. 4

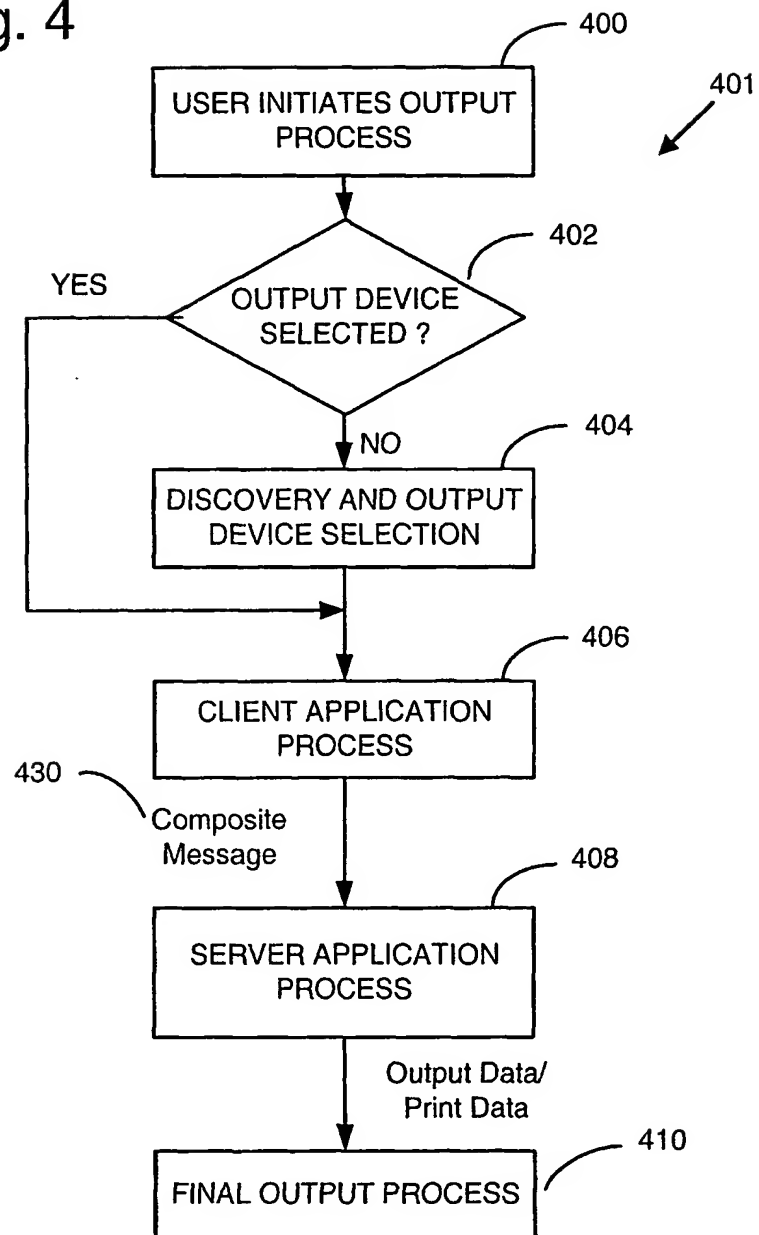


Fig. 5

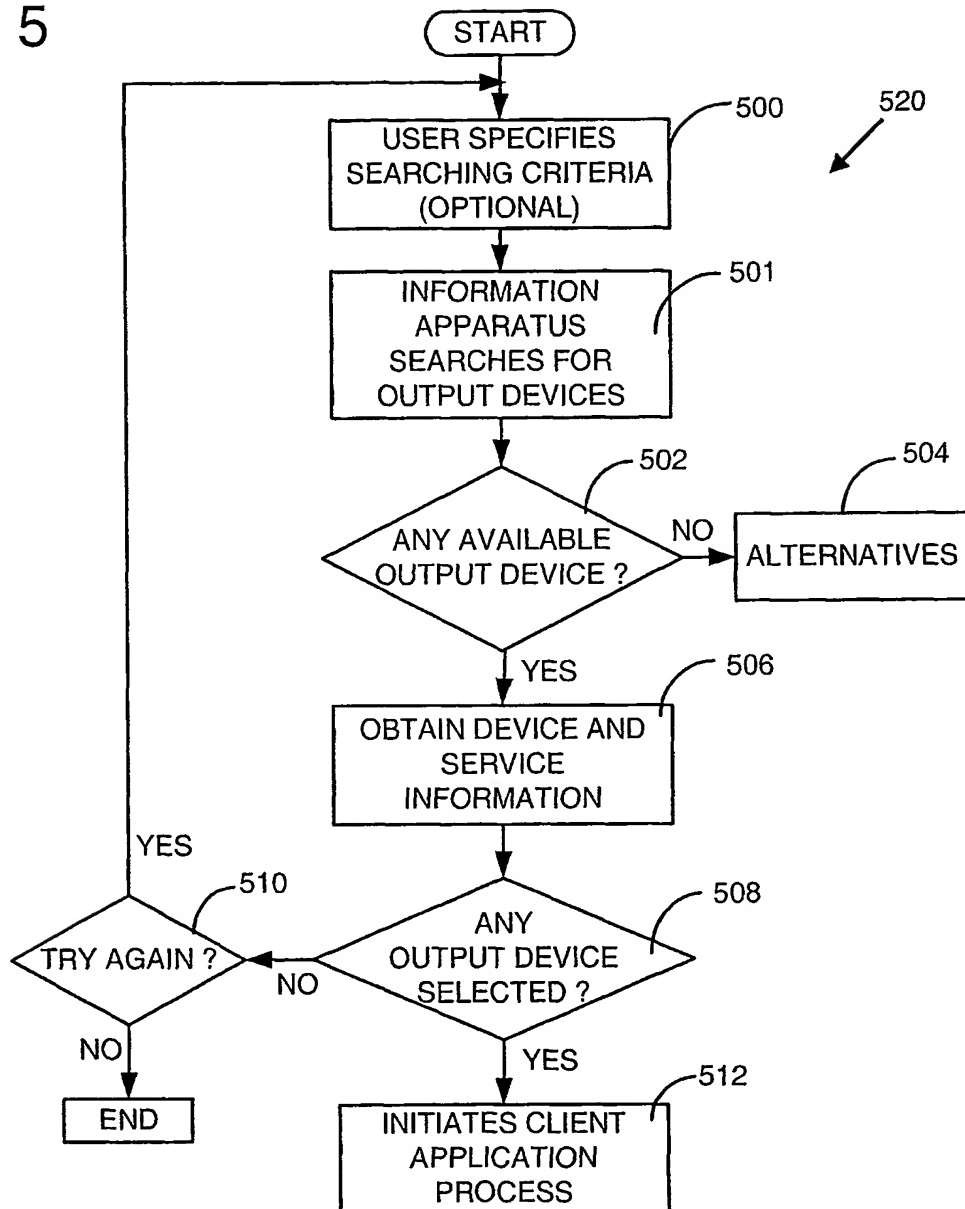




Fig. 6

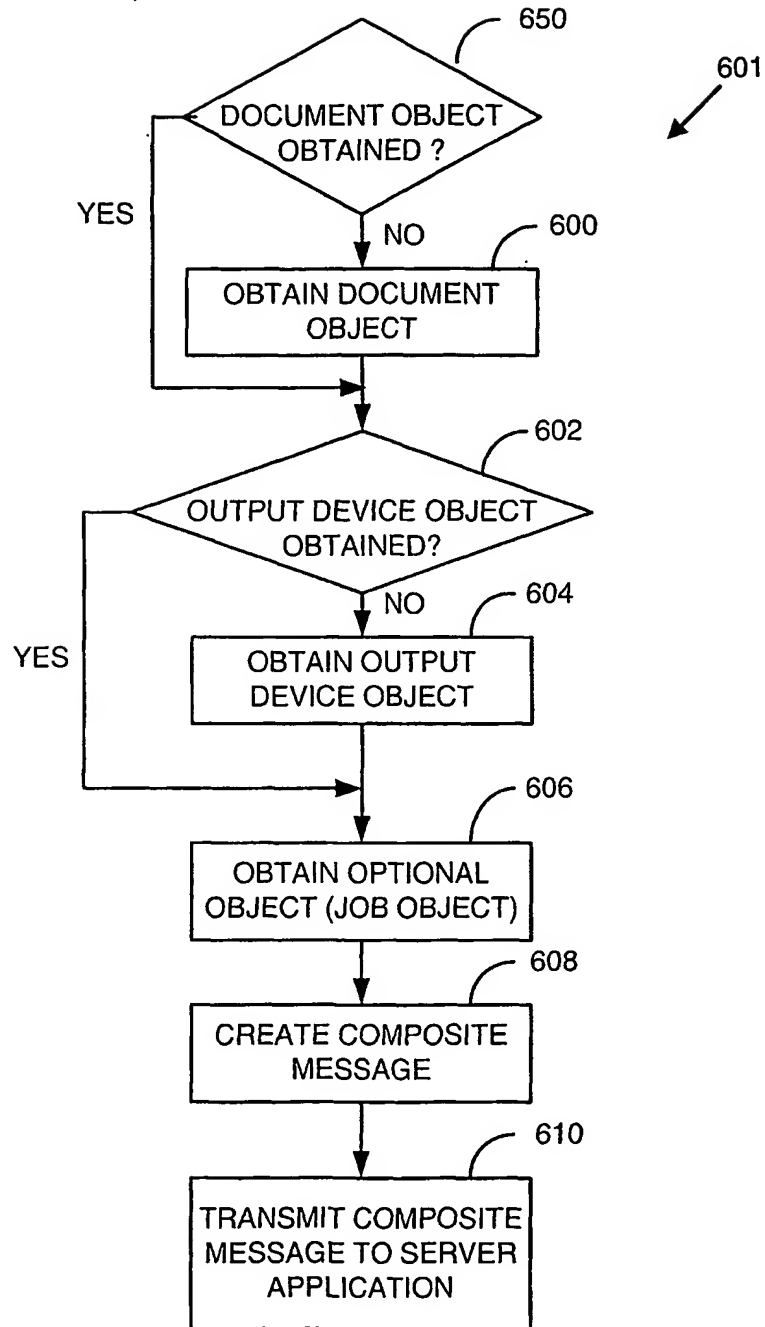


Fig. 7

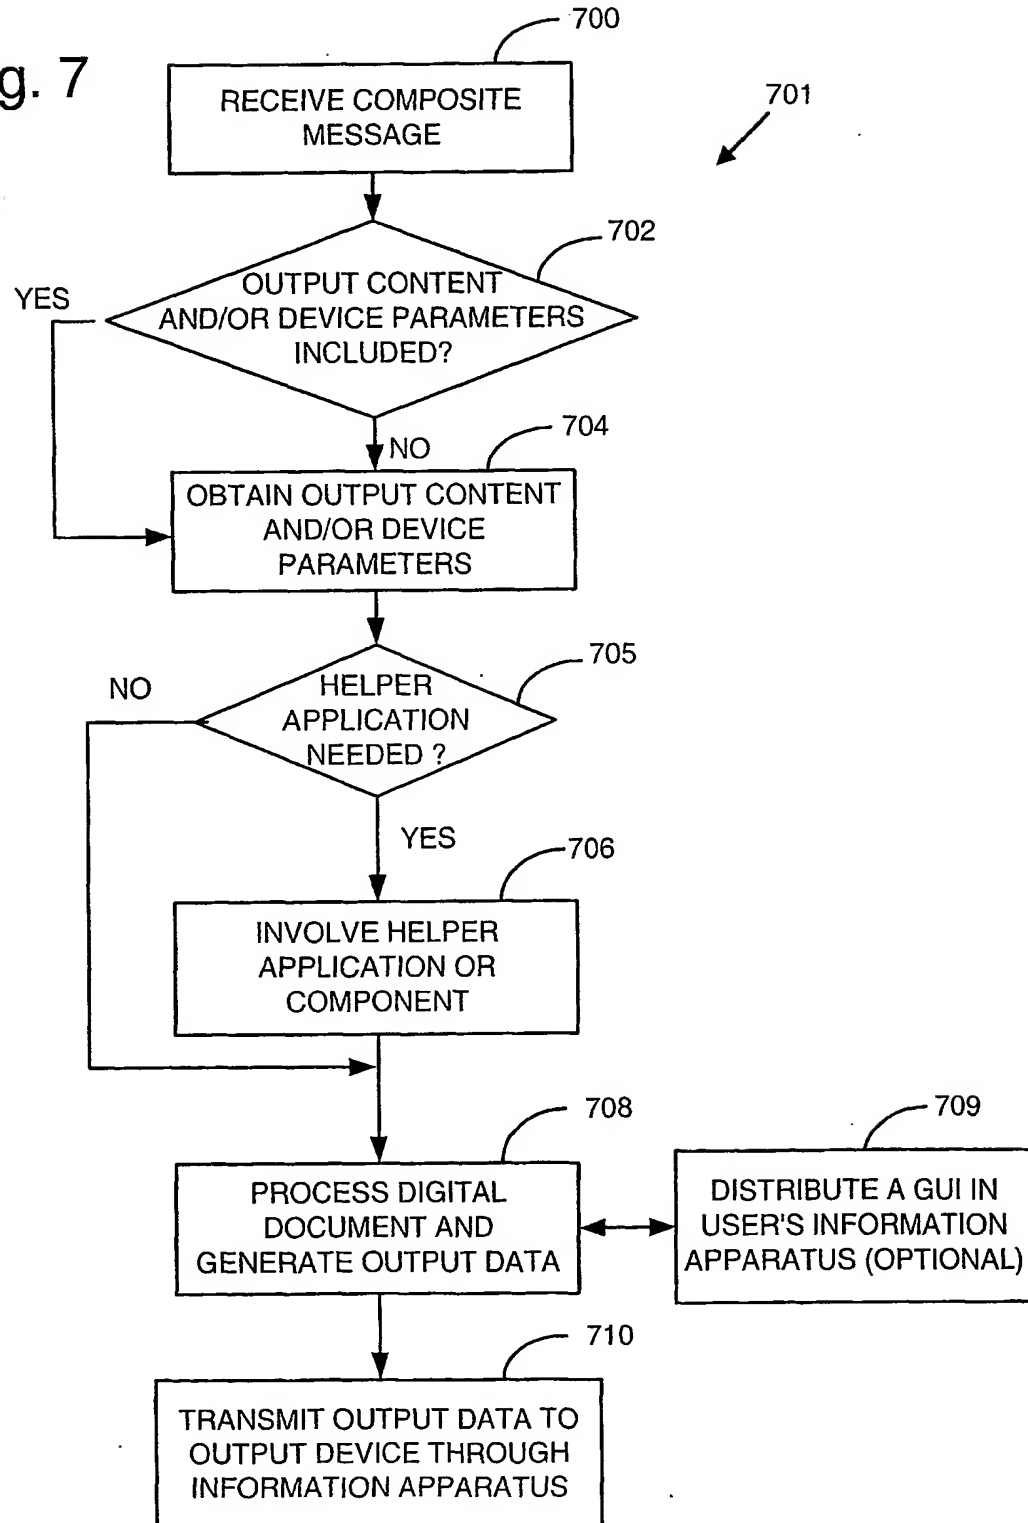
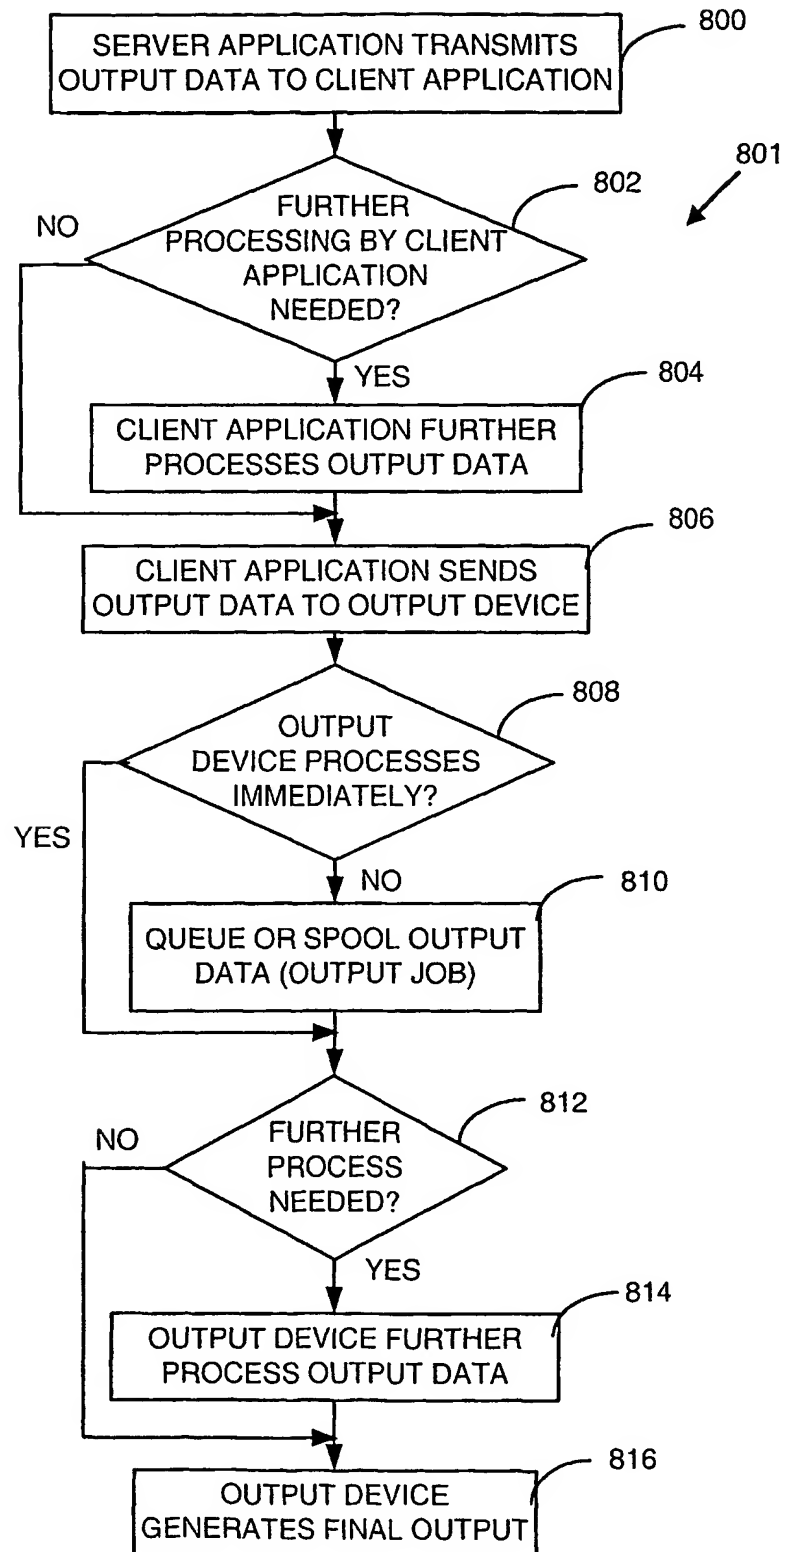


Fig. 8



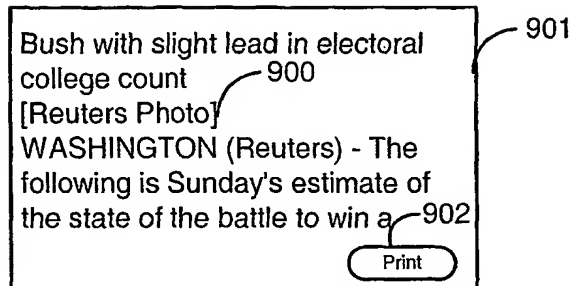


Fig. 9 A

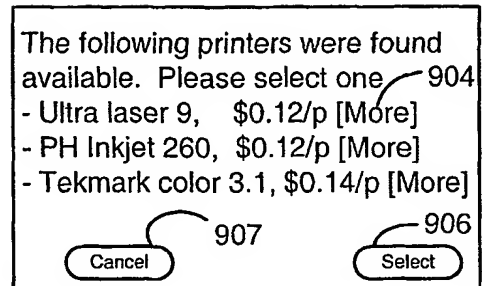


Fig. 9 B

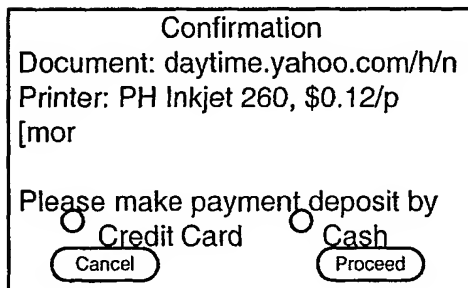


Fig. 9 C

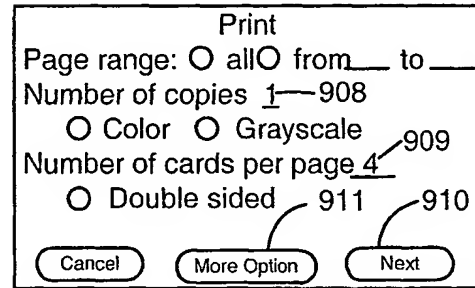


Fig. 9 D

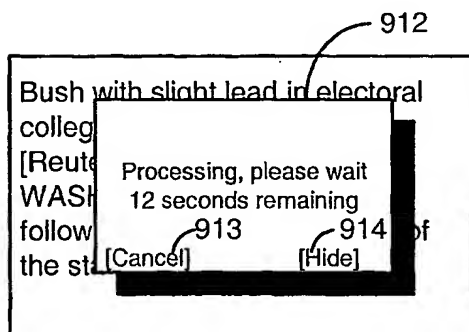


Fig. 9 E

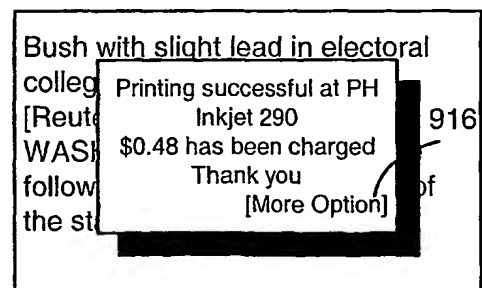


Fig. 9 F

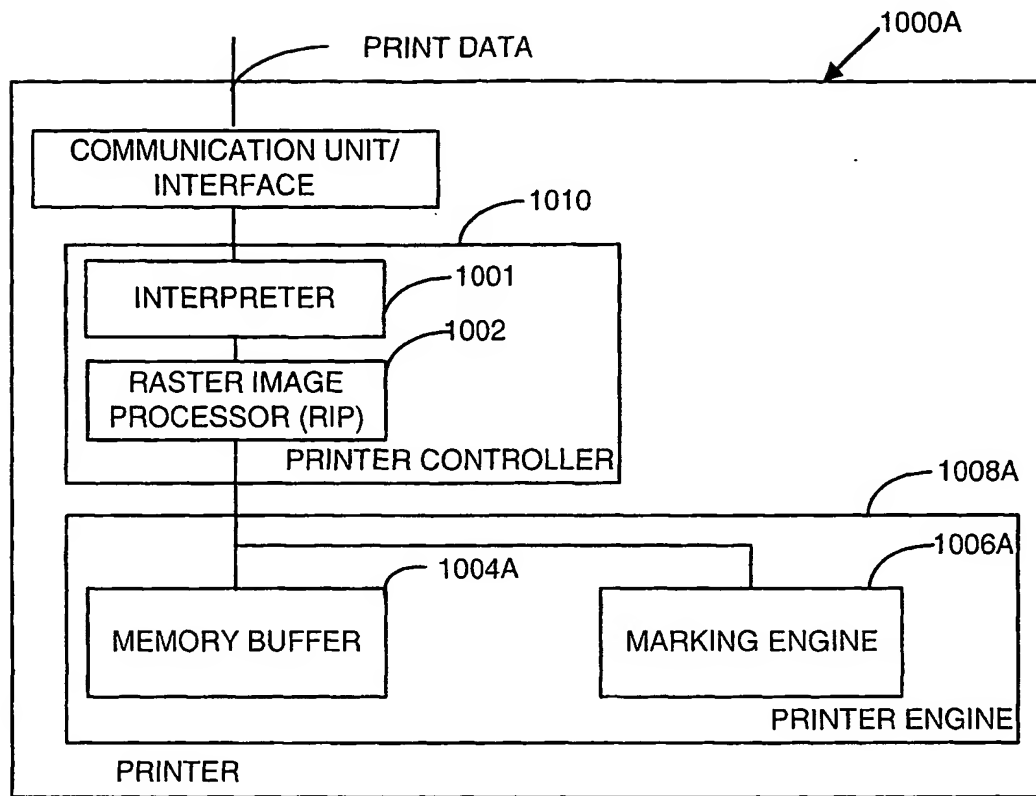


Fig. 10 A

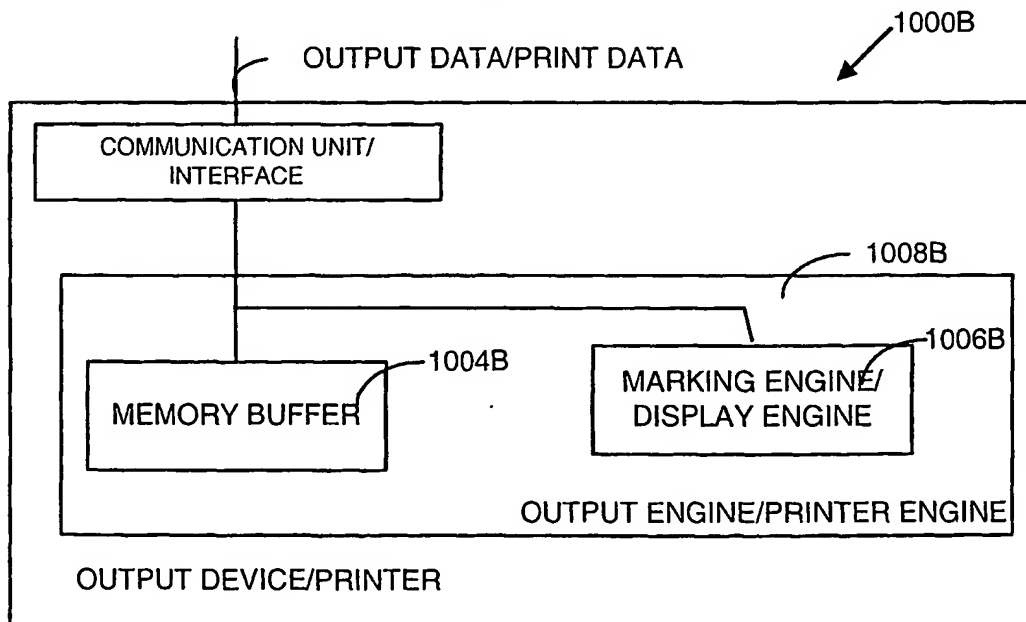


Fig. 10 B

THIS PAGE BLANK (11/30/70)